

## Bullnose Kerfed Corner Bead

**Creates a rounded or bullnose paintable finish around door and window trims**

Bullnose kerfed corner bead is designed with a return leg that can be inserted into the channel of door and window jambs. This feature provides for efficient, clean installation as well as the smooth, rounded appearance associated with bullnose trims. Rigid vinyl is dent resistant, rust proof and maintains shape with no sharp edges or burrs when field cut. A cost effective alternative to expensive wood trims.

- For finishing arches, curvatures and most radii with a rounded bullnose look
- Easily to install

### Product Data & Ordering Information:

**Material:** 0.028" PVC (Polyvinyl Chloride)

**Dimensions:** 3/4" & 1-1/2" Radius

Product code	Radius	Flange	Length	Pcs./Ctn.
BKB75-8	3/4"	7/8"	8'	35
BKB75-10	3/4"	7/8"	10'	35
BKB150-8	1-1/2"	7/8"	8'	30
BKB150-10	1-1/2"	7/8"	10'	30

### Code Approvals & Performance Standards

- [ASTM C840](#) Standard Specification for Application and Finishing of Gypsum Board
- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D3678](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Interior - Profile Extrusions
- [SDS Vinyl Corp](#) PVC Compounds

### Storage:


All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.



**BKB75**



**BKB150**

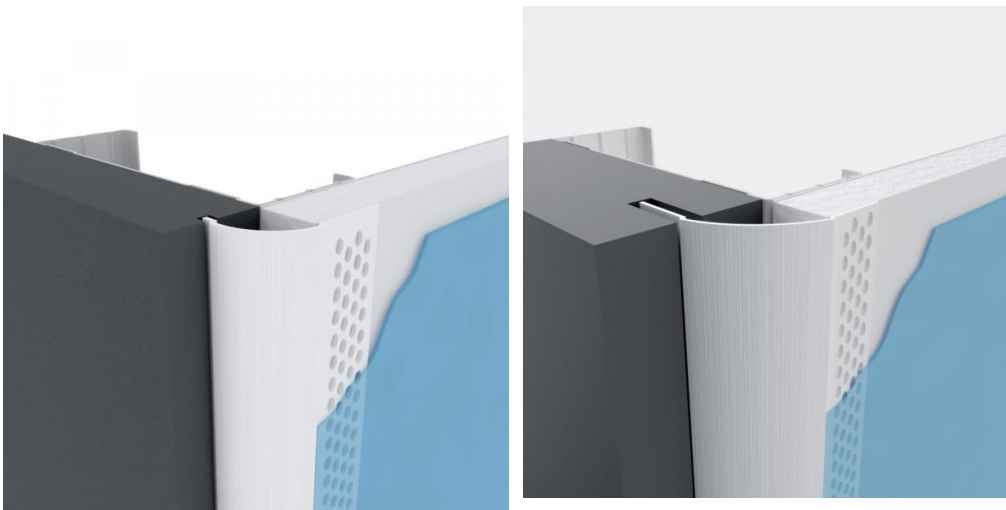

**BKB75**

**BKB150**