

Quicksilver™ Corner Bead (CBS)

Hot-dipped Metal Corner Bead

ClarkDietrich Quicksilver™ flanges are deeply knurled and perforated for excellent joint compound adhesion. This product combines a unique manufacturing process with specially enhanced galvanized steel to provide consistent finishing. This traditional drywall finishing product is nailed, stapled, screwed or clinched into place

Product Data & Ordering Information

Material: 0.0125" min. thickness, G30 hot-dipped galvanized steel

Dimensions: 1-1/4" leg x 1-1/4" leg


Width	Length	Wt./Ctn.	Pcs./Ctn.
1-1/4" x 1-1/4"	6'-9"	56 lbs	75
1-1/4" x 1-1/4"	6'-10"	57 lbs	75
1-1/4" x 1-1/4"	7'	56 lbs	72
1-1/4" x 1-1/4"	8'	56 lbs	63
1-1/4" x 1-1/4"	9'	56 lbs	56
1-1/4" x 1-1/4"	10'	55 lbs	50
1-1/4" x 1-1/4"	12'	56 lbs	42

Code Approvals & Performance Standards

- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [SDS For ASTM A653 Steel Finishing Products](#) For Interior Finishing and Exterior Finishing

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

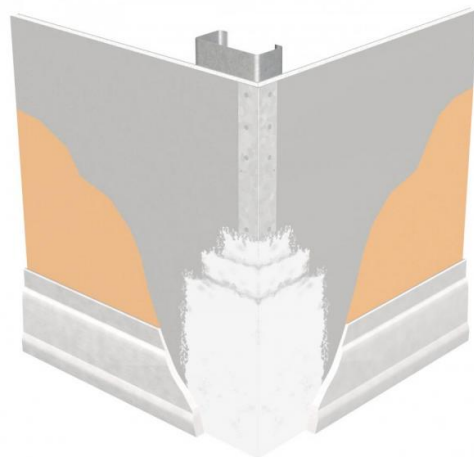

- Strong metal reinforcement for drywall corners
- Exposed nose of the bead resists impact and forms a screed for finishing