

Splayed Corner Bead (CB12)

Metal Corner Bead

120/135° corner bead, also referred to as splayed or off-angle bead, provides a clean, crisp finished look at off-angle intersections. This traditional drywall finishing bead is nailed, stapled or screwed into place and finished with joint compound to provide a high-quality professional finish. Flanges are knurled and perforated to enhance compound adhesion and the exposed nose forms a screed for finishing.

Product Data & Ordering Information

Material: 0.0125" min. thickness, galvanized coating

Dimensions: 1-1/4" leg x 1-1/4" leg

Width	Length	Wt./Ctn.	Pcs./Ctn.
1-1/4" x 1-1/4"	8'	56 lbs	63
1-1/4" x 1-1/4"	10'	55 lbs	50

Code Approvals & Performance Standards


- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [SDS For ASTM A653 Steel Finishing Products](#) For Interior Finishing and Exterior Finishing

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

Sustainability Credits For more details and LEED letters contact Technical Services at 888-437-3244 or visit clarkdietrich.com/LEED.

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

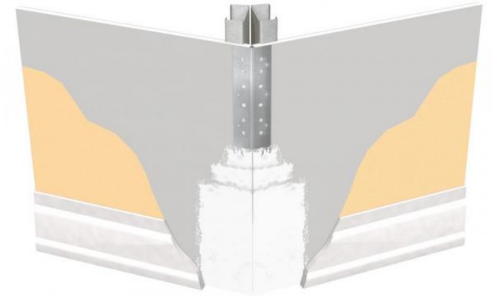

- Galvanized for superior compound adhesion
- Easy to attach and finish
- Galvanized for corrosion protection