

3/8" Rib Metal Lath

The most rigid of all expanded metal lath products

A High-Rib Metal Lath with a herringbone mesh pattern and seven, 3/8" deep, longitudinal, solid steel ribs at intervals of 3-7/8" across the sheet. These ribs provide the superior strength and exceptional rigidity required when framing is more than 16" on center but does not exceed 24" on center.

Commonly used for soffits and ceilings under steel or wood joists construction.

The heavy ribs enable use on ceiling or wall spans at 24" compliant to Table 3 of ASTM C1063. This reinforced lath product is also used on 2" stud-less partitions and as reinforcement for concrete floor and roof slabs.

Product Data & Ordering Information:

Material: G60 Galvanized Steel
 Packaged: 50 bundles or 500 pieces per pallet

Product Code	Wt. per Sq. Yd.	Sheet Size	Sheets/Bundle	Bundles/Pallet
LAR	3.4 lbs.	27" x 97"	10	50

ASTM & Code Standards:

- Material: ASTM C847
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A653/A653M.
- Intertek CCR-0204 - Metal Lath - Code Compliance Report
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- Installation: ASTM C1063 (exterior), ASTM C841 (interior), ASTM C1780 (thin veneer stone).



Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination per ASTM C1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.

09.22.36 (Metal Lath)

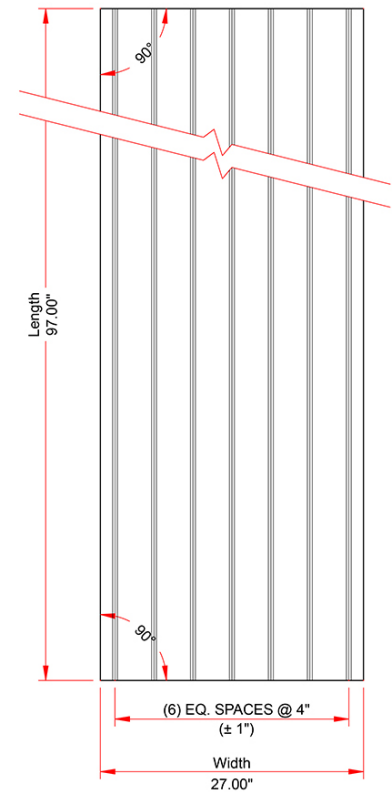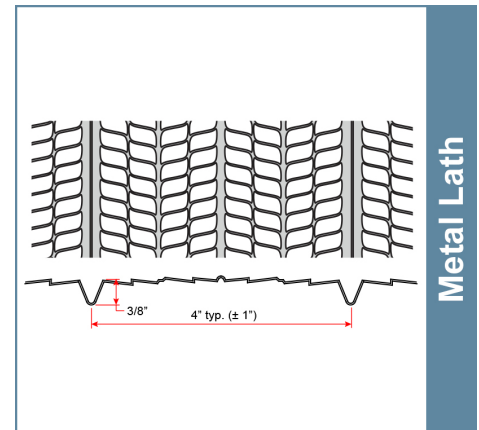

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
 Address:

Contractor Information

Name:
 Contact:
 Phone:
 Fax:

Architect Information

Name:
 Contact:
 Phone:
 Fax: