

3/8" Rib Metal Lath

The most rigid of all expanded metal lath products

A High-Rib Metal Lath with a herringbone mesh pattern and seven, 3/8" deep, longitudinal, solid steel ribs at intervals of 3-7/8" across the sheet. These ribs provide the superior strength and exceptional rigidity required when framing is more than 16" on center but does not exceed 24" on center.

Commonly used for soffits and ceilings under steel or wood joists construction.


The heavy ribs enable use on ceiling or wall spans at 24" compliant to Table 3 of ASTM C1063. This reinforced lath product is also used on 2" stud-less partitions and as reinforcement for concrete floor and roof slabs.

Product Data & Ordering Information:

Material: G60 Galvanized

Packaged: 25 bundles or 250 pieces per pallet

Product Code	Wt. per Sq. Yd.	Sheet Size	Sheets/Bundle	Bundles/Pallet
LAR	3.4 lbs.	27" x 97"	10	25

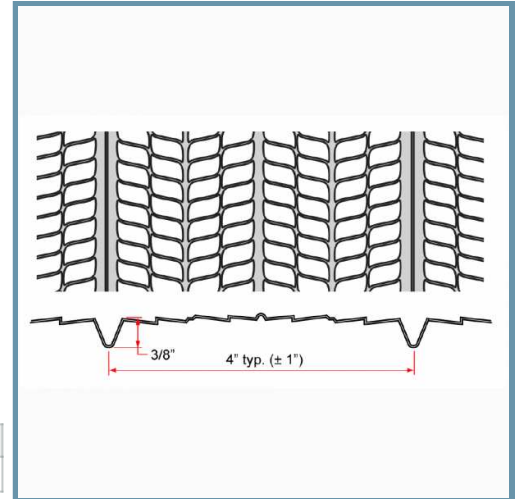

Code Approvals & Performance Standards

- [ASTM A653](#) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- [ASTM C841](#) Standard Specification for Installation of Interior Lathing and Furring
- [ASTM C847](#) Standard Specification for Metal Lath
- [ASTM C926](#) Standard Specification for Application of Portland Cement - Based Plaster
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [Intertek CCRR-0204](#) Metal Lath - Code Compliance Research Report
- [SDS For ASTM A653 Steel Finishing Products](#) For Interior Finishing and Exterior Finishing

Sustainability Credits For more details and LEED letters contact Technical Services at 888-437-3244 or visit clarkdietrich.com/LEED.

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination per ASTM C1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.

