

## Diamond Mesh Lath

### Galvanized, expanded steel plaster and stucco base

A superior, multi-purpose expanded steel substrate for Portland cement or widely used for interior and exterior gypsum plaster and stucco & stone reinforcement. Applications include ceilings, soffits, and fascia surfaces, and under ceramic tile in wall, ceiling, and floor applications. Metal lath is useful in general purpose applications and is the best lath available for ornamental work and for flat or contoured surfaces as well as for use as a reinforcing underlay for spray-applied fireproofing.

Expanded metal lath is formed from sheet steel that has been slit and expanded to form hundreds of "keys" per square yard. It is proven over time to possess exceptional strength and flexibility, making it the preferred metal base requested by contractors and design professionals.

2.5# and 3.4# metal lath are available in G90 coating with a special order and lead time. Diamond metal lath are also available with a 60-Minute Grade-D asphalt paper-backing (APB) weather resistant barrier.

#### Product Data & Ordering Information:

Material: G-60 Galvanized Steel  
 Packaged: 25 bundles or 250 pieces per pallet

Product Code	Wt. per Sq. Yd.	Sheet Size	Pcs./Bdl.	Yds./Bdl.	Yds./Pallet
LAM	2.5 lbs.	27" x 97"	10	20	500
LAM	3.4 lbs.	27" x 97"	10	20	500

#### ASTM & Code Standards:

- Material: ASTM C847
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A653/A653M.
- Intertek CCR-0204 - Metal Lath - Code Compliance Research Report
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)
- Installation: ASTM C1063 (exterior), ASTM C841 (interior), ASTM C1780 (thin veneer stone).


#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination per ASTM C847 & C1063.


#### Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives. Flat lath must be furred on solid surfaces that receive stucco.

09.22.36 (Metal Lath)

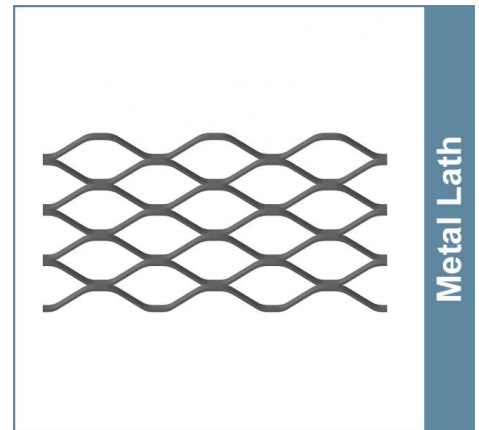

Metal Lath

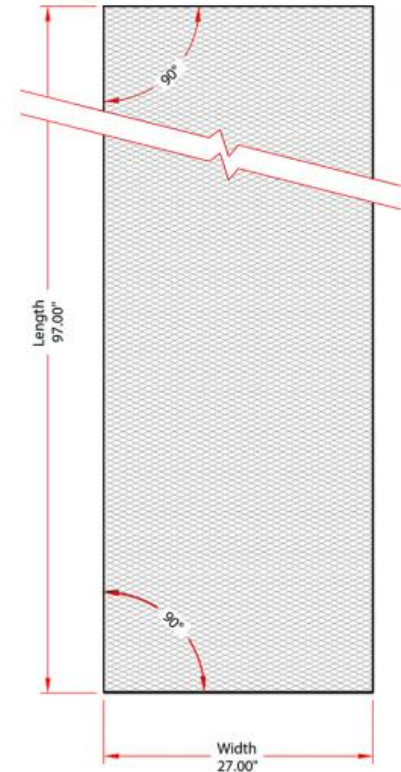

#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

Project Information	Contractor Information	Architect Information
Name:	Name:	Name:
Address:	Contact:	Contact:
	Phone:	Phone:
	Fax:	Fax: