

Product category: ProTRAK® 30MIL Drywall Track 1-1/4" leg
Product name: 362PDT125-30 33ksi G40EQ - Unpunched
 3-5/8" ProTRAK 30MIL (30mil)

Coating: G40EQ
 Color coding: Pink

Geometric Properties

Inside web depth	3.625 in	Weight	0.649 lb/ft
Leg width	1.250 in	Minimum thickness	0.0296 in
Design thickness	0.0312 in		
Yield stress, Fy	33 ksi		

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.191 in ²
Moment of inertia (Ix)	0.389 in ⁴
Radius of gyration (Rx)	1.428 in
Gross moment of inertia (Iy)	0.027 in ⁴
Gross radius of gyration (Ry)	0.378 in


Effective Section Properties, Strong Axis

Effective area (Ae)	0.087 in ⁴
Moment of inertia for deflection (Ixe)	0.330 in ⁴
Section modulus (Sxe)	0.149 in ³
Allowable bending moment (Ma)	2,938 in-lbs
Allowable shear force in web (Vag)	lb

Torsional Properties

St. Venant torsion constant (J x 1000)	0.0619 in ⁴
Warping constant (Cw)	0.067 in ⁶
Distance from shear center to neutral axis (Xo)	-0.661 in
Radii of gyration (Ro)	1.619 in
Torsional flexural constant (Beta)	0.833

09.22.16 (Non-Structural Metal Framing)

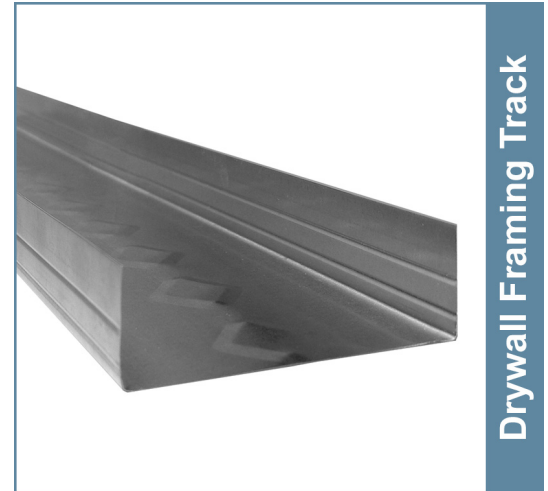

Drywall Framing Track

* Embossments in web are only placed on sections 2-1/2" and wider.

ASTM & Code Standards:

- AISI S100-12 & S220-15
- Meets or exceeds ASTM C645 & C754
- ASTM E119, E72 & E90
- Intertek CCRR-0207, LA RR 26019
- ProSTUD complies with the SFIA Code Compliance Certification Program
- Multiple UL® Design Listing including: V438, V450 & U419
- SDS & Product Certification Information available at www.clarkdietrich.com.
- U.S. Patent No. 9,010,070



Notes:

- Calculated properties are based on AISI S100-12, North American Specification for Design of Cold-Formed Steel Structural Members and AISI S220-15, North American Standard for Cold-Formed Steel Framing - Nonstructural Members.
- Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI A7.2.
- Tabulated gross properties, including torsional properties, are based on full-unreduced cross section of the tracks.
- For deflection calculations, use the effective moment of inertia.
- Allowable moment includes cold work of forming.
- Allowable moment is taken as the lowest value based on local or distortional buckling. Distortional buckling strength is based on a k-phi = 0.
- Web depth for track sections is equal to the nominal height plus two times the design thickness plus the bend radius. Hems on nonstructural track sections are ignored.

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information	Contractor Information	Architect Information
Name:	Name:	Name:
Address:	Contact:	Contact:
	Phone:	Phone:
	Fax:	Fax: