

Spazzer® 5400 Spacing and Bridging Bar - 18ga (SPZS-43) 43mils (18ga) Spazzer 5400 (Exterior) Spacing and Bridging Bar

The Spazzer 5400 bar is a prenotched bridging and spacing bar engineered to facilitate the rapid erection of structural wall framing.

Spazzer 5400 (SPZS-43) bar is a prenotched, 18-gauge (43mil), 50" long galvanized steel spacer and bridging bar, engineered to facilitate the rapid erection of exterior curtainwall framing, load-bearing walls and high interior partitions constructed of structural studs.

For load-bearing studs or for 20-gauge nonload-bearing studs, the Spazzer 5400 Bar Guard™ bar retainer clip, the Spazzer Snap-In Grommet or screws are required to keep the bar in place. Spazzer bar should not be used in studs over 8" wide.

Product Data & Ordering Information:

Material: Grade 50ksi min. (340MPa)
 Coating: CP60 (G90 available)
 Thickness: 18ga (43mil), 0.0451" Design Thickness, 0.0428" Min. Thickness
 Dimensions: 1-1/4" x 1-1/4" (31.8mm x 31.8mm)
 Stock Lengths: 50" Long (1270mm)
 Packaging: 20 pieces per carton / 680 pieces per skid
 Product Weight: 1.57 lb/piece


ASTM & Code Standards:

- Spazzer 5400 Spacing and Bridging Bar is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Alternative Products:

- U-channel (CRC) with clip angles
- Blocking and Strapping

05.40.00 (Cold-Formed Metal Framing)

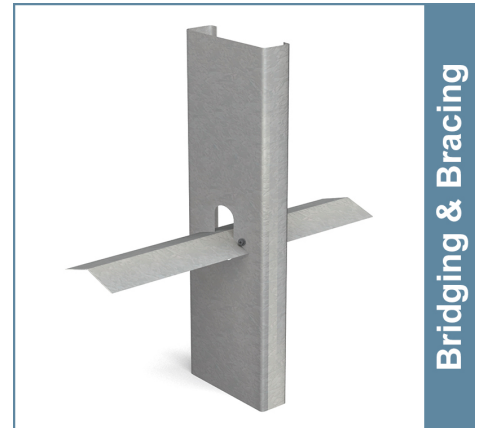

Bridging & Bracing

- Saves up to 40% in combined labor and material costs.
- Prenotched at 12", 16" and 24" intervals, so no layout is needed.
- Eliminates clip angles and the labor required to install them.



Spazzer®
Snap-In
Grommet



Spazzer® Bar Guard™

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: