

Can-Patch (Residential)

Patches

Easily installs using standard drywall compounds. Can-Patch will not fuzz-up during sanding.

- Pre-cut to fit standard residential ceiling lights
- Repairs and reinforces mis-cut or damaged areas around ceiling lights and can light holes
- Install in areas where patching cutouts were made too large
- Ceiling lights and can light relocation

Product Data & Ordering Information

Product Code	Size	Hole Size	Wholesale Case Pcs/Case Pack
CPR-100	8" x 8"	6-1/4" dia.	10 bags of 10

ASTM & Code Standards

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Installation:

- To apply, lightly sand area to be repaired.
- Apply drywall compound 1/8"-1/4" thick directly to back of patch.
- Place patch over center of repair and wipe down flat to wall using joint knife.
- Immediately skim-coat patch and let dry.
- Apply second coat, let dry, and sand. Compound that remains on backside of Can-Patch makes patch very rigid in the damaged area

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from weather and moisture.

09.22.00 (Support for Plaster & Gypsum Board)

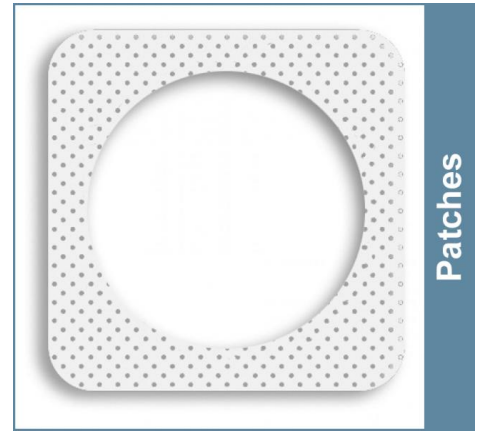

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: