

Deck-Patch Patches

Custom manufactured to match the contours of different decking.

- Made in three foot sections for easy handling
- Great as a template for cutting drywall to fit the corrugated decking
- Perforated PVC fiber composite material

Product Data & Ordering Information

Product Code	Width	Wholesale Case Pcs/Case Pack	Wholesale Case Cases/Pallet
DP36-34	2-1/2" x 36"	34 Patches, 102 lf	24

ASTM & Code Standards

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Installation:

- To install, apply drywall compound 1/8"-1/4" thick directly to back of patch.
- Place patch in the contour of decking and wipe down flat to wall using joint knife.
- Immediately skim-coat patch and let dry.
- Apply second coat, let dry, and sand.
- Repairs Over Painted Surfaces: Recommend the use of Strait-Flex Super-Bond mixed with all-purpose joint compound to enhance bondability.

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from weather and moisture.

09.22.00 (Support for Plaster & Gypsum Board)

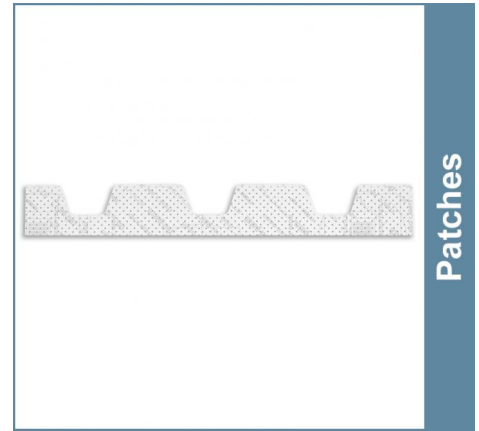

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: