

Head-Patch Patches

Pre-cut to fit standard sprinkler head safety caps and PVC pipes, Head-Patch will not sag on large ceiling mis-cuts. Head-Patch will not fuzz-up during sanding.

- Pre-cut to fit standard sprinkler head safety caps
- Repairs and reinforces mis-cut or damaged areas around sprinkler head holes
- Install in areas where patching cutouts were made too large
- Sprinkler head replacement patch

Product Data & Ordering Information

Product Code	Width	Dia. Hole	Wholesale Case Case Pack	Wholesale Case Cases/Pallet
HP-100	5"	2-1/4"	5 bags of 20	24

ASTM & Code Standards

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Installation:

- To apply, lightly sand area to be repaired.
- Apply drywall compound 1/8"-1/4" thick directly to back of patch.
- Place patch over center of repair and wipe down flat to wall using joint knife.
- Immediately skim-coat patch and let dry.
- Apply second coat, let dry, and sand.
- Compound that remains on backside of Head-Patch makes patch very rigid in the damaged area.
- Repairs Over Painted Surfaces: Recommend the use of Strait-Flex Super-Bond mixed with all-purpose joint compound to enhance bondability.

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from weather and moisture.

09.22.00 (Support for Plaster & Gypsum Board)

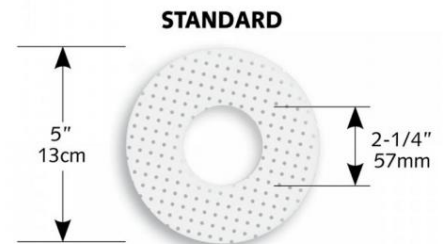

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: