

Strait-Flex® L-Bead

Premium Trims and Tapes


09.22.00 (Support for Plaster & Gypsum Board)

Strait-Flex L-Bead is designed to finish edges on drywall. L-Bead comes in a roll that performs like conventional L-Bead.

- Window returns, sky lights, and wall edges
- Produced for drywall thickness of 1/2" standard and 5/8"
- Note: Full composite materials, not paper-faced

Product Data & Ordering Information:

Product Code	Width	Length	Rolls/Case	Cases/Pallet
LB12-100	2-1/4"	100'	12	24
LB58-100	2-1/4"	100'	12	24

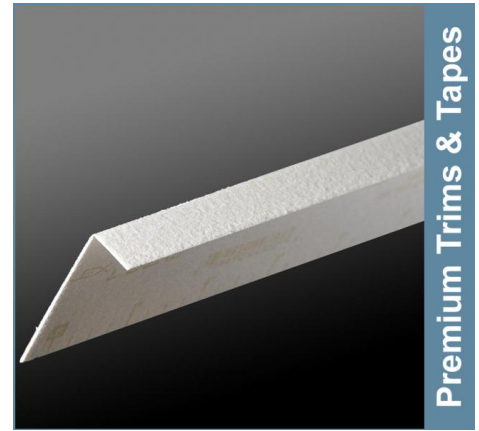


ASTM & Code Standards

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Installation

- Cut L-Bead to desired length. Fold L-Bead in half at center crease with print size facing each other.
- Apply all-purpose compound to corner. Press L-Bead into the wet compound, adjust to create a straight line, and wipe down with a taping knife.
- A second coat can be applied immediately. Let dry completely over several hours or overnight.
- With a 6" or 8" taping knife, apply your final coat of compound feathering the compound beyond previous coat. Let dry completely over several hours or overnight.
- Sand lightly with 120 grit sandpaper. L-Bead will not fuzz-up like paper or mesh tapes.

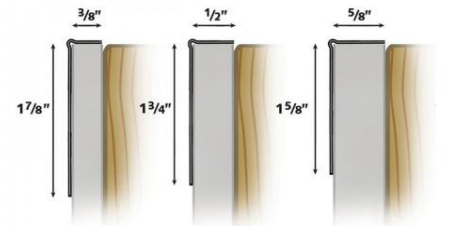

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from weather and moisture.

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: