

## Outlet-Patch

### Electrical Outlet-Patch

Outlet-Patch is an electrical outlet-patch that will not fuzz-up during sanding.

- Pre-cut to fit standard receptacle boxes
- Repairs and reinforces mis-cut or damaged areas around receptacle box
- Very fast, extremely strong

#### Product Data & Ordering Information:

| Product Code | Width           | Type         | Pcs/Case Pack | Cases/Pallet |
|--------------|-----------------|--------------|---------------|--------------|
| OP-2PK       | 4-3/4" x 6-1/4" | 2 Pack Card  | 50 cards of 2 | 24           |
| OP-100       | 4-3/4" x 6-1/4" | 20 Count Bag | 5 bags of 20  | 24           |
| OP-500       | 4-3/4" x 6-1/4" | 20 Count Bag | 25 bags of 20 | 24           |


#### ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)

#### Installation

- To apply, lightly sand area to be repaired.
- Apply drywall compound 1/8"-1/4" thick directly to back of patch.
- Place patch over center of repair and wipe down flat to wall using joint knife.
- Immediately skim-coat patch and let dry.
- Apply second coat, let dry, and sand. Compound that remains on backside of Outlet-Patch makes patch very rigid in the damaged area.

### 09.22.00 (Support for Plaster & Gypsum Board)

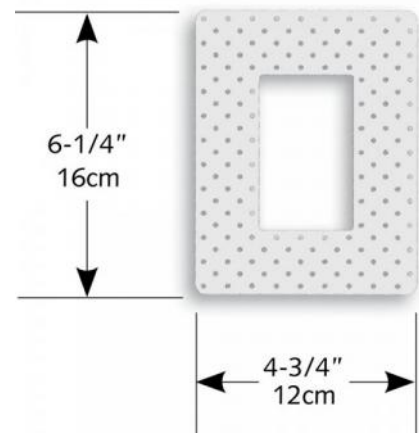

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: