

Strait-Flex® OS-400

Stick Corner Bead - Paper-Faced Composite

Designed for outside 90° corners where large voids and irregularities occur. OS-400 can also be used on double 5/8" drywall applications. The diamond-punched paper edging allows for easier feathering, faster drying, and the highest bonding strength. Also guarantees an even lay-down of the paper, providing maximum adhesion with no rippling or blistering. Apply with all-purpose joint-compound.

- Double 5/8" drywall applications and outside 90° corners where there are large drywall irregularities
- Clean installation
- Composite backing provides a tough, durable corner with no rust
- Nose resists dents and ensures perfect corners without paper fuzz-up during finishing and sanding

Product Data & Ordering Information

| Product Code | Width | Length | Wholesale Case Pcs/Case Pack | Wholesale Case Cases/Pallet |
|--------------|-------|--------|------------------------------|-----------------------------|
| OS400-8 | 4" | 8' | 50pcs. (400 lf) | 32 |
| OS400-9 | 4" | 9' | 50pcs. (450 lf) | 32 |
| OS400-10 | 4" | 10' | 50pcs. (500 lf) | 32 |
| OS400-12 | 4" | 12' | 50pcs. (600 lf) | 32 |

ASTM & Code Standards

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs



Installation

- Cut Strait-Flex OS-400 to measured length.
- For vertical corners, cut 1/4" short of floor.
- Apply all-purpose joint compound with Mud-Pro2 (compound applicator) to corner bead; or apply compound to outside corners with a 5" or 6" taping knife.
- Press corner bead into wet compound by hand or use Strait-Flex's OS-400 Rolling Tool for fastest results.
- Adjust if necessary to create a straight line.
- Wipe down edges and let dry.
- Apply final coat, let dry, and sand.
- Repairs Over Painted Surfaces: Strait-Flex recommends the use of Strait-Flex Super-Bond mixed with all-purpose joint compound to enhance bondability.

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from weather and moisture.

09.22.00 (Support for Plaster & Gypsum Board)

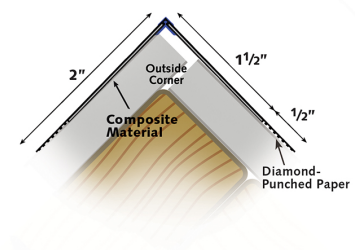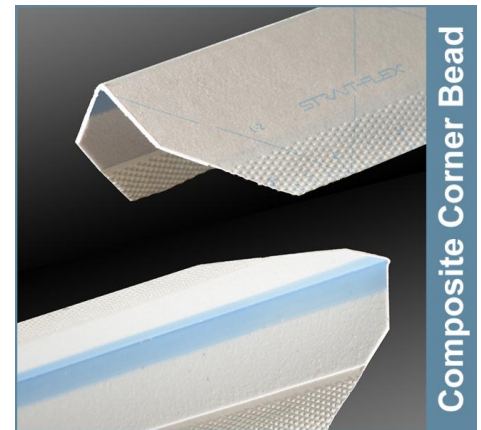

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: