

## Strait-Flex® Tile-Tape

### Premium Trims and Tapes

Tile-Tape prevents leaks caused by common grout cracks. Tile-Tape is applied over seams and corners formed by tile substrate and mold resistant boards in wet areas. Tile-Tape is manufactured from a composite material giving the tape strength and mold-resistant qualities. Two times stronger than paper or mesh tape, it will not cut or snag when applying tile setting compound with a notched trowel.

- Produces straight, strong, and water-proof inside, outside and off-angled corners
- Prevents leaks caused by common grout cracks
- Mold and alkali resistant
- Watertight seams
- Will not cut or snag with notched trowel when applying tile setting compound
- Apply over fiber cement board, green board, mold-resistant board, or water-resistant board in wet areas (tubs, showers, tile counter tops, tub deck, and steps)

### Product Data & Ordering Information

Product Code	Width	Length	Wholesale Case Rolls/Case Pack	Wholesale Case Cases/Pallet
T-100	2-1/4"	100'	12	24

### ASTM & Code Standards

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)


### Installation:

- Cut Tile-Tape to desired length.
- Fold in half at center crease for inside or outside corners.
- For inside corners, print-side faces out.
- For outside corners, print-side faces wall.
- Using a 5" or 6" taping knife, apply a liberal coat of tile-setting compound such as latex-fortified mortar or Type 1 organic adhesive to flat joints or inside corners. Press Tile-Tape into wet compound.
- Adjust if necessary to create a straight line and wipe down with taping knife.
- Apply tile-setting compound with notched trowel and install tile or marble.

### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from weather and moisture.

## 09.22.00 (Support for Plaster & Gypsum Board)

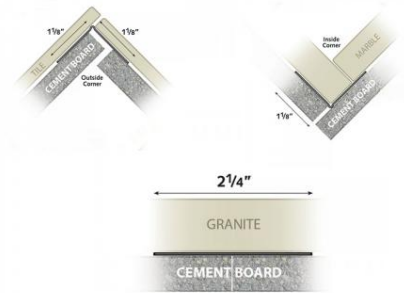

### Project Information

Name:  
Address:

### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax: