

10" TradeReady® Floor Joist (1000TDW24-200-97)

Floor Joist with extruded holes

Geometric Properties

Web depth (A): 10.00 in

Flange width (B): 2.00 in

Extruded hole spacing: 24 in

Coating: CP60

Extruded hole shape: Ellipse

Extruded hole Height: 6.25"



Extruded hole width: 6.25"

Design thickness: 0.1017 in


Min. steel thickness: 0.0966 in

Yield stress, Fy: 50 ksi

Gross Section Properties of Full Section	
Cross sectional area	1.473 in ²
Member weight per foot of length	4.838 lbs/ft
Moment of inertia (Ix)	19.314 in ⁴
Radius of gyration (Rx)	3.621 in
Gross moment of inertia (Iy)	0.609 in ⁴
Gross radius of gyration (Ry)	0.643 in
Net Section Properties (at Extruded Hole)	
Cross sectional area (A net)	0.948 in ²
Moment of inertia (Ix net)	18.365 in ⁴
Radius of gyration (Rx net)	4.400 in
Net moment of inertia (Iy net)	0.456 in ⁴
Net radius of gyration (Ry net)	0.693 in
Allowable Capacities (Fully Braced)	
Local Moment at Full Section (Mal-full)	115.65 in-kips
Distortional Moment at Full Section (Mad-full)	105.53 in-kips
Local Moment at Knockout (Mal-kno)	109.97 in-kips
Distortional Moment at Knockout (Mad-kno)	97.43 in-kips
Shear at Knockout (Va-kno)	3957 lbs
Shear at Full Section (Va-full)	9862 lbs
Torsional Section Properties	
Distance between centroid and shear-center (Xo)	-1.088 in
Distance between centroid and web-centerline (X)	0.376 in
St. Venant torsional constant (J*1000)	5.082 in ⁴
Torsional warping constant (Cw)	12.679 in ⁶
Radius of gyration (Ro)	3.836 in
Torsional flexural constant (Beta)	0.920
Unbraced Length (Lu)	39.1 in
Effective Section Properties	
Moment of inertia (Ixe)	19.337 in ⁴
Section modulus (Sxe)	3.863 in ³

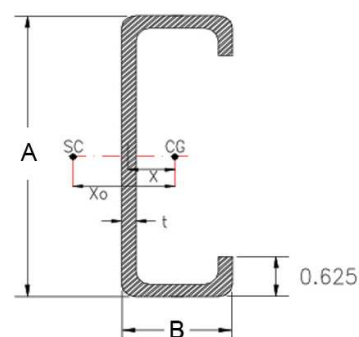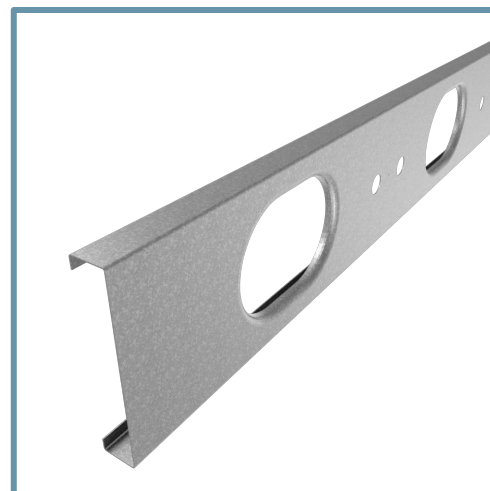

GROSS SECTION

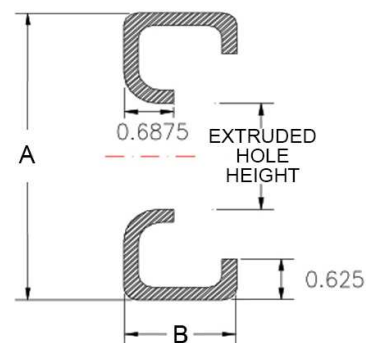

NET SECTION

Code Approvals & Performance Standards

- [AISI S100-16 \(2020\) w/S2-20](#) North American Specification for the Design of Cold-Formed Steel Structural Members
 - Direct Strength Method (DSM) utilized for calculating flexural strength
- [AISI S240-15](#) North American Standard for Cold-Formed Steel Structural Framing
 - Section A3 Material - Chemical & mechanical requirements (Referencing ASTM A1003/A1003M)
 - Section A4 Corrosion Protection (Referencing ASTM A653/A653M)
 - Section A5 Products - Thickness, shapes, tolerances, identification
- [SDS For ASTM A1003 Steel Framing Products](#) For Interior Framing, Exterior Framing and Clips/Accessories