

## 12" TradeReady® Floor Joist (1200TDW24-200-68)

Floor Joist with extruded holes

### Geometric Properties

**Web depth (A):** 12.00 in

**Flange width (B):** 2.00 in

**Extruded hole spacing:** 24 in

**Coating:** CP60

**Extruded hole shape:** Circular

**Extruded hole Height:** 8"



**Extruded hole width:** 8"

**Design thickness:** 0.0713 in


**Min. steel thickness:** 0.0677 in

**Yield stress, Fy:** 50 ksi

| Gross Section Properties of Full Section         |                        |
|--|------------------------|
| Cross sectional area                             | 1.192 in <sup>2</sup>  |
| Member weight per foot of length                 | 3.898 lbs/ft           |
| Moment of inertia (Ix)                           | 21.932 in <sup>4</sup> |
| Radius of gyration (Rx)                          | 4.290 in               |
| Gross moment of inertia (Iy)                     | 0.478 in <sup>4</sup>  |
| Gross radius of gyration (Ry)                    | 0.634 in               |
| Net Section Properties (at Extruded Hole)        |                        |
| Cross sectional area (A net)                     | 0.705 in <sup>2</sup>  |
| Moment of inertia (Ix net)                       | 20.255 in <sup>4</sup> |
| Radius of gyration (Rx net)                      | 5.360 in               |
| Net moment of inertia (Iy net)                   | 0.355 in <sup>4</sup>  |
| Net radius of gyration (Ry net)                  | 0.710 in               |
| Allowable Capacities (Fully Braced)              |                        |
| Local Moment at Full Section (Mal-full)          | 79.37 in-kips          |
| Distortional Moment at Full Section (Mad-full)   | 75.62 in-kips          |
| Local Moment at Knockout (Mal-kno)               | 101.07 in-kips         |
| Distortional Moment at Knockout (Mad-kno)        | 67.66 in-kips          |
| Shear at Knockout (Va-kno)                       | 2399 lbs               |
| Shear at Full Section (Va-full)                  | 2770 lbs               |
| Torsional Section Properties                     |                        |
| Distance between centroid and shear-center (Xo)  | -1.017 in              |
| Distance between centroid and web-centerline (X) | 0.344 in               |
| St. Venant torsional constant (J*1000)           | 2.020 in <sup>4</sup>  |
| Torsional warping constant (Cw)                  | 14.176 in <sup>6</sup> |
| Radii of gyration (Ro)                           | 4.456 in               |
| Torsional flexural constant (Beta)               | 0.948                  |
| Unbraced Length (Lu)                             | 38.7 in                |
| Effective Section Properties                     |                        |
| Moment of inertia (Ixe)                          | 20.712 in <sup>4</sup> |
| Section modulus (Sxe)                            | 2.651 in <sup>3</sup>  |

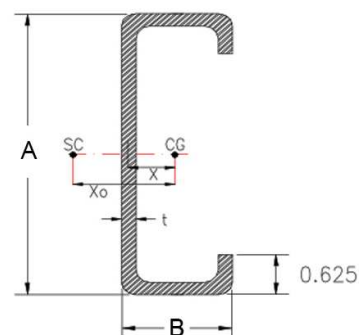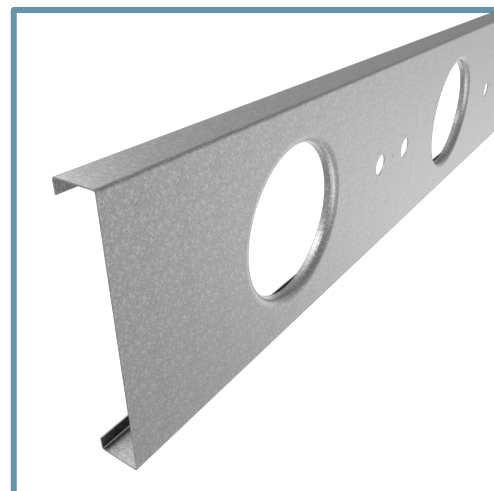

GROSS SECTION

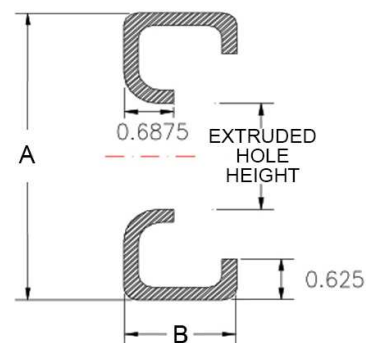

NET SECTION

### Code Approvals & Performance Standards

- [AISI S100-16 \(2020\) w/S2-20](#) North American Specification for the Design of Cold-Formed Steel Structural Members
  - Direct Strength Method (DSM) utilized for calculating flexural strength
- [AISI S240-15](#) North American Standard for Cold-Formed Steel Structural Framing
  - Section A3 Material - Chemical & mechanical requirements (Referencing ASTM A1003/A1003M)
  - Section A4 Corrosion Protection (Referencing ASTM A653/A653M)
  - Section A5 Products - Thickness, shapes, tolerances, identification
- [SDS For ASTM A1003 Steel Framing Products](#) For Interior Framing, Exterior Framing and Clips/Accessories