

8" TradeReady® Floor Joist (800TDJ24-175-43)

Floor Joist with extruded holes

Geometric Properties

Web depth (A): 8.00 in

Flange width (B): 1.75 in

Extruded hole spacing: 24 in

Coating: CP60

Extruded hole shape: Ellipse

Extruded hole Height: 4.25"



Extruded hole width: 7"

Design thickness: 0.0451 in


Min. steel thickness: 0.0428 in

Yield stress, Fy: 33 ksi

Gross Section Properties of Full Section	
Cross sectional area	0.559 in ²
Member weight per foot of length	1.829 lbs/ft
Moment of inertia (Ix)	4.942 in ⁴
Radius of gyration (Rx)	2.972 in
Gross moment of inertia (Iy)	0.211 in ⁴
Gross radius of gyration (Ry)	0.615 in
Net Section Properties (at Extruded Hole)	
Cross sectional area (A net)	0.424 in ²
Moment of inertia (Ix net)	4.912 in ⁴
Radius of gyration (Rx net)	3.404 in
Net moment of inertia (Iy net)	0.171 in ⁴
Net radius of gyration (Ry net)	0.635 in
Allowable Capacities (Fully Braced)	
Local Moment at Full Section (Mal-full)	19.56 in-kips
Distortional Moment at Full Section (Mad-full)	20.82 in-kips
Local Moment at Knockout (Mal-kno)	24.27 in-kips
Distortional Moment at Knockout (Mad-kno)	19.77 in-kips
Shear at Knockout (Va-kno)	949 lbs
Shear at Full Section (Va-full)	1051 lbs
Torsional Section Properties	
Distance between centroid and shear-center (Xo)	-1.086 in
Distance between centroid and web-centerline (X)	0.389 in
St. Venant torsional constant (J*1000)	0.379 in ⁴
Torsional warping constant (Cw)	2.794 in ⁶
Radii of gyration (Ro)	3.224 in
Torsional flexural constant (Beta)	0.887
Unbraced Length (Lu)	44.6 in
Effective Section Properties	
Moment of inertia (Ixe)	4.797 in ⁴
Section modulus (Sxe)	0.990 in ³

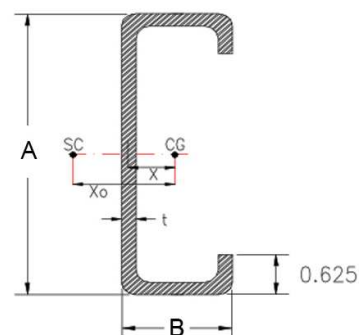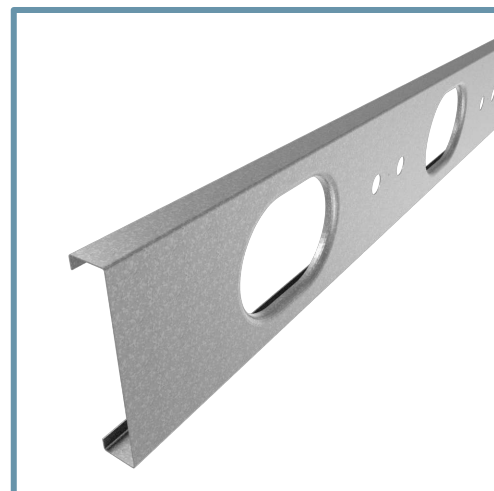

GROSS SECTION

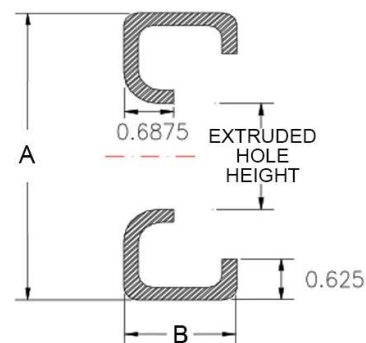

NET SECTION

Code Approvals & Performance Standards

- [AISI S100-16 \(2020\) w/S2-20](#) North American Specification for the Design of Cold-Formed Steel Structural Members
 - Direct Strength Method (DSM) utilized for calculating flexural strength
- [AISI S240-15](#) North American Standard for Cold-Formed Steel Structural Framing
 - Section A3 Material - Chemical & mechanical requirements (Referencing ASTM A1003/A1003M)
 - Section A4 Corrosion Protection (Referencing ASTM A653/A653M)
 - Section A5 Products - Thickness, shapes, tolerances, identification
- [SDS For ASTM A1003 Steel Framing Products](#) For Interior Framing, Exterior Framing and Clips/Accessories