


## 11-1/4" TradeReady® Floor Joist (1125TDJ24-175-68)



Floor Joist with extruded holes

### Geometric Properties

<b>Web depth (A):</b> 11.25 in	<b>Extruded hole shape:</b> Ellipse	<b>Design thickness:</b> 0.0713 in
<b>Flange width (B):</b> 1.75 in	<b>Extruded hole Height:</b> 6.25"	<b>Min. steel thickness:</b> 0.0677 in
<b>Extruded hole spacing:</b> 24 in	<b>Extruded hole width:</b> 9"	<b>Yield stress, Fy:</b> 50 ksi
<b>Coating:</b> CP60		

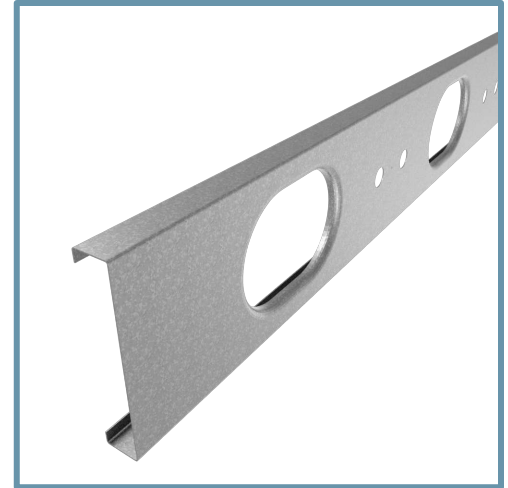

Gross Section Properties of Full Section	
Cross sectional area	1.103 in <sup>2</sup>
Member weight per foot of length	3.605 lbs/ft
Moment of inertia (Ix)	17.574 in <sup>4</sup>
Radius of gyration (Rx)	3.992 in
Gross moment of inertia (Iy)	0.339 in <sup>4</sup>
Gross radius of gyration (Ry)	0.554 in
Net Section Properties (at Extruded Hole)	
Cross sectional area (A net)	0.741 in <sup>2</sup>
Moment of inertia (Ix net)	16.959 in <sup>4</sup>
Radius of gyration (Rx net)	4.785 in
Net moment of inertia (Iy net)	0.275 in <sup>4</sup>
Net radius of gyration (Ry net)	0.610 in
Allowable Capacities (Fully Braced)	
Local Moment at Full Section (Mal-full)	71.02 in-kips
Distortional Moment at Full Section (Mad-full)	67.33 in-kips
Local Moment at Knockout (Mal-kno)	90.27 in-kips
Distortional Moment at Knockout (Mad-kno)	59.81 in-kips
Shear at Knockout (Va-kno)	2357 lbs
Shear at Full Section (Va-full)	2961 lbs
Torsional Section Properties	
Distance between centroid and shear-center (Xo)	-0.885 in
Distance between centroid and web-centerline (X)	0.297 in
St. Venant torsional constant (J*1000)	1.869 in <sup>4</sup>
Torsional warping constant (Cw)	8.956 in <sup>6</sup>
Radii of gyration (Ro)	4.128 in
Torsional flexural constant (Beta)	0.954
Unbraced Length (Lu)	34.3 in
Effective Section Properties	
Moment of inertia (Ixe)	16.728 in <sup>4</sup>
Section modulus (Sxe)	2.372 in <sup>3</sup>

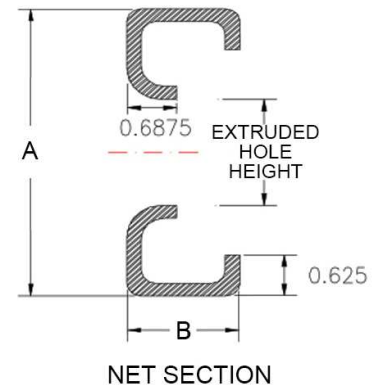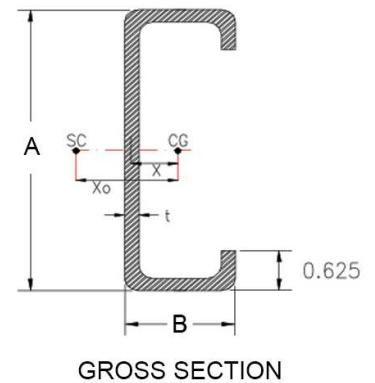

### Code Approvals & Performance Standards

- [AISI S100-16 \(2020\) w/S2-20](#) North American Specification for the Design of Cold-Formed Steel Structural Members
  - Direct Strength Method (DSM) utilized for calculating flexural strength
- [AISI S240-15](#) North American Standard for Cold-Formed Steel Structural Framing
  - Section A3 Material - Chemical & mechanical requirements (Referencing ASTM A1003/A1003M)
  - Section A4 Corrosion Protection (Referencing ASTM A653/A653M)
  - Section A5 Products - Thickness, shapes, tolerances, identification
- [SDS For ASTM A1003 Steel Framing Products](#) For Interior Framing, Exterior Framing and Clips/Accessories