

## TradeReady® Floor Joist

Product category 12" 2" Flange 12ga TradeReady Joist  
 Product name 1200TDW200-97 (50ksi) - Punched Finish: CP60

### Geometric Properties

Web depth	12.000 in	Design thickness	0.1017 in
Flange width	2.000 in	Min. steel thickness	0.0966 in
Stiffening lip	0.625 in	Yield stress	Fy 50ksi
		Ultimate, Fu	65 ksi

### Gross Section Properties of Full Section

Cross sectional area (A)	1.682 in <sup>2</sup>
Member weight per foot of length	5.503 lbs/ft
Moment of inertia (Ix)	30.60 in <sup>4</sup>
Radius of gyration (Rx)	4.265 in
Gross moment of inertia (Iy)	0.642 in <sup>4</sup>
Gross radius of gyration (Ry)	0.618 in

### Net Section Properties (at knockout)

Cross sectional area (A)	0.940 in <sup>2</sup>
Moment of inertia (Ix)	27.45 in <sup>4</sup>
Radius of gyration (Rx)	5.405 in
Gross moment of inertia (Iy)	0.457 in <sup>4</sup>
Gross radius of gyration (Ry)	0.698 in

### Allowable Capacities

Fully Braced Allowable Moment at Knockout (Ma-kno)	128,668 in-lbs
Fully Braced Allowable Moment at Full Section (Ma-full)	139,942 in-lbs
Allowable Shear at Knockout (Va-kno)	4,357 lbs
Allowable Shear at Full Section (Va-full)	8,108 lbs

### Torsional Section Properties

Distance between centroid and shear-center (Xo)	-0.988 in
Distance between centroid and web-centerline (X)	0.332 in
St. Venant torsional constant (J*1000)	5.797 (in <sup>4</sup> )
Torsional warping constant (Cw)	19.15 (in <sup>6</sup> )
Radii of gyration (Ro)	4.421 in
Torsional flexural constant (Beta)	0.950

### Effective Section Properties

Moment of inertia (Ix)	30.32 (in <sup>4</sup> )
Section modulus (Sx)	4.674 (in <sup>3</sup> )

### ASTM & Code Standards:

- AISI North American Specification [NASPEC] 2004
- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)
- U.S. Patent Nos. 6,301,854; 6,691,478; 6,418,694; 6,691,487; 6,761,005; 7,240,459
- Canadian Patent No. 2319346, Mexican Patent No. 243294


### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)



**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

## 05.40.00 (Cold-Formed Metal Framing)

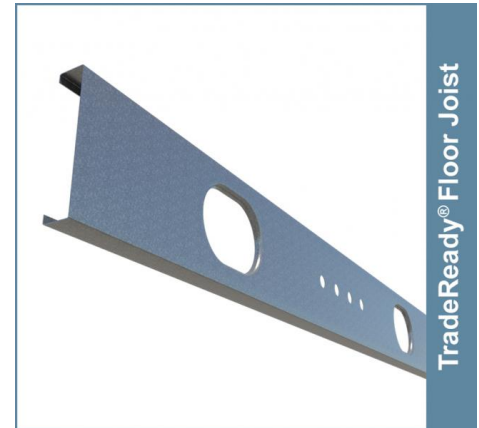

TradeReady® Floor Joist

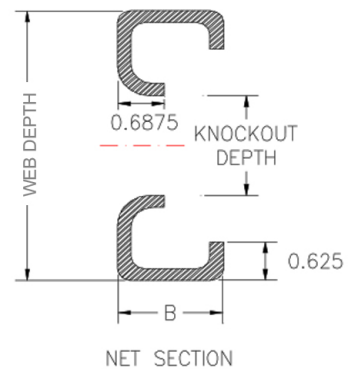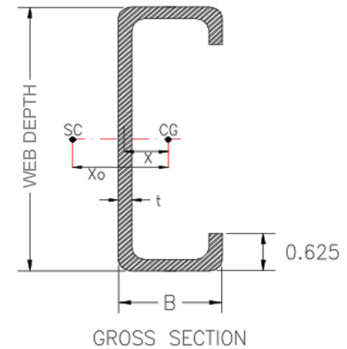

### Project Information

Name:  
Address:

### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax: