

Product category: (TTS) TRAKLOC® Track
Product name: 362TTS137-24 33ksi G40
 3-5/8" TRAKLOC® Track 24 mils (20ga EQ)
 Coating: G40
 Color coding: Pink

Geometric Properties

Inside web depth	3.625 in	Weight	0.542 lb/ft
Leg width	1.375 in	Minimum thickness	0.0238 in
Design thickness	0.0250 in		
Yield stress, Fy	33 ksi		

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.159 in ²
Moment of inertia (Ix)	0.335 in ⁴
Radius of gyration (Rx)	1.451 in
Gross moment of inertia (Iy)	0.029 in ⁴
Gross radius of gyration (Ry)	0.424 in

Effective Section Properties

Effective area (Ae)	0.048 in ²
Moment of Inertia (Ix)	0.258 in ⁴
Section Modulus (Sx)	0.082 in ³
Allowable bending moment (Mal)	2813 in-lbs
Allowable shear force in web (Vag)	390 lb


Torsional Properties

St. Venant torsion constant (J x 1000)	0.0332 in ⁴
Warping constant (Cw)	0.070 in ⁶
Distance from shear center to neutral axis (Xo)	-0.760 in
Radii of gyration (Ro)	1.692 in
Torsional flexural constant (Beta)	0.798

Notes:

- Calculated properties are based on AISI S100-07 w/ S2-10 Supplement and AISI S100-12, North American Specification for Design of Cold-Formed Steel Structural Members.
- Effective properties incorporate the strength increase from the cold-work of forming as applicable per AISI A7.2.
- For deflection calculations, use the effective moment of inertia.
- Allowable moment includes cold-work of forming.

09.22.16 (Non-Structural Metal Framing)

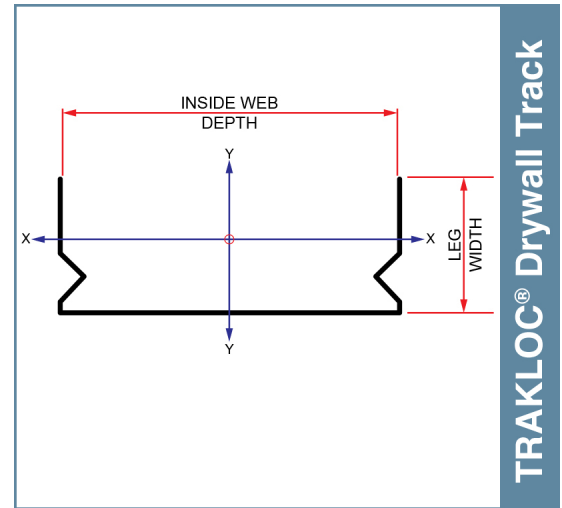

ASTM & Code Standards:

- AISI-NASPEC 2007 w/S2-10
- Meets or exceeds ASTM C645
- ICC ESR-1464 - Evaluation Report
- SDS & Product Certification Information available at www.clarkdietrich.com.



Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: