

3/4" Bullnose J-Bead

Bullnose Corner Bead

Covers raw edges of drywall with 3/4" radius bullnose corner. Ideal for finishing door and window openings. The perforated flange accepts joint compound or veneer plaster for a flush finish. Designed to be applied after the wallboard is installed.

Product Data & Ordering Information:

Material: 0.028" PVC (Polyvinyl Chloride)
 Dimensions: 7/8" perforated flanges with short back leg

Product code	Board thickness	Radius	Flange	Length	Pcs./Ctn.
BJB50S-8	1/2"	3/4"	7/8"	8'	30
BJB50S-10	1/2"	3/4"	7/8"	10'	30
BJB58S-10	5/8"	3/4"	7/8"	10'	30

ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C841 (Interior Finishes)
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Support for Plaster & Gypsum Board)



- Moisture and dent resistant
- Produces finished edges at panel terminations
- Nail or slip on

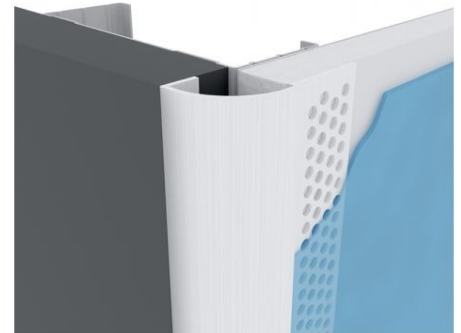

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: