

"DX" Expansion Joint

Assists in controlling cracking of wallboard

Provides stress relief and assists in controlling cracking in large area of wallboard. Designed to be installed with the drywall. Adjusts from 1/4" to 1/2".

Product Data & Ordering Information:

| Product code | Board thickness | Flanges | Length | Pcs/Box |
|--------------|-----------------|---------|--------|---------|
| DX50 | 1/2" | 3/4" | 10' | 25 |
| DX58 | 5/8" | 3/4" | 10' | 25 |

ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 - Standard Specification for Rigid Poly Vinyl Chloride (PVC) Interior Profile Extrusions
- Installation: ASTM C840 - Standard Specification for Application and Finishing of Gypsum Board
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.29.00 (Gypsum Board)



Expansion Joint

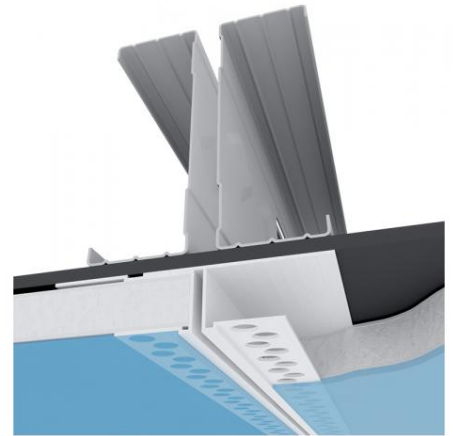

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: