

1-1/2" Bullnose Splayed Corner Bead

Bullnose splayed corner bead is used to finish off-angle interior corners from 120 - 135° when a rounded bullnose look is desired. Bullnose bead provides an architecturally attractive, contemporary and open feel to any room. This durable trim product is dent resistant, rust-proof and easily finished. Multiple perforations along both flanges enhance joint compound bond.

Product Data & Ordering Information:

Dimensions: 1-1/2" Radius


| Product code | Radius | Flanges | Length | Pcs./Ctn. |
|--------------|--------|---------|--------|-----------|
| BSB150-8 | 1-1/2" | 7/8" | 8' | 30 |
| BSB150-10 | 1-1/2" | 7/8" | 10' | 30 |

Code Approvals & Performance Standards

- [ASTM C840](#) Standard Specification for Application and Finishing of Gypsum Board
- [ASTM C841](#) Standard Specification for Installation of Interior Lathing and Furring
- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D3678](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Interior - Profile Extrusions
- [SDS Vinyl Corp](#) PVC Compounds

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

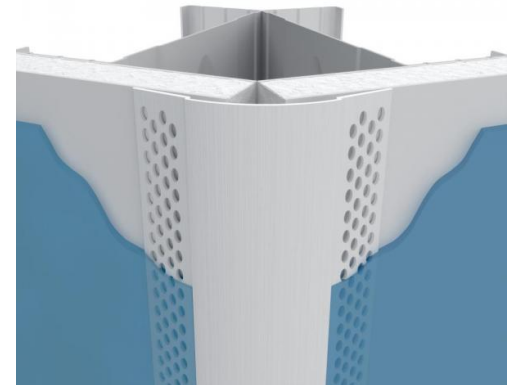

- Rust proof and dent resistant
- Multiple perforations enhance joint compound bond
- Flexibility allows snug fit on unusual outside corner angles
- Easily cut with snips, utility knives or scissors