

PRO Splayed Corner Bead

Splayed Corner Bead

PRO Splayed Corner Bead is an adjustable corner bead designed for off-angle outside corner conditions from 120° to 140°. Multiple perforations along the 1-1/4" flanges enhance joint compound bonding. Easy to apply, this vinyl trim can be nailed, stapled or attached with a high tack spray adhesive. Vinyl beads are easily cut with snips or utility knives without distorting the profile.

Product Data & Ordering Information:

Material: 0.040" PVC (Polyvinyl Chloride)

Dimensions: 1-1/4" leg x 1-1/4" leg


Product code	Flanges	Length	Pcs./Ctn.
PROSB125-8	1-1/4"	8'	70
PROSB125-9	1-1/4"	9'	70
PROSB125-10	1-1/4"	10'	70

Code Approvals & Performance Standards

- [ASTM C840](#) Standard Specification for Application and Finishing of Gypsum Board
- [ASTM C841](#) Standard Specification for Installation of Interior Lathing and Furring
- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D3678](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Interior - Profile Extrusions
- [SDS Vinyl Corp](#) PVC Compounds

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

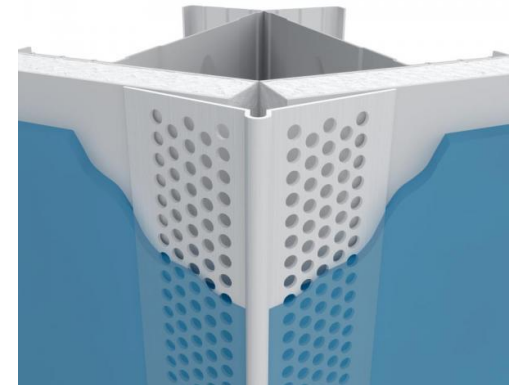

- Rust proof and dent resistant
- Flexibility allows flush fit on unusual outside corner angles