

Rip-Bead® L-Bead Commerical Beads

Rip Bead® L-Bead produces an exceptional finish at intersection of gypsum panels to ceiling grid, window returns and dissimilar wall types. A tear-away strip on the Rip Bead L-Bead provides a protective edge and a guide for the drywall finishing knives. Once joint compound is applied, finished and painted, the tear-away strip is removed to form a crisp, clean edge. Multiple perforations along the nailing flange enhance strong compound adhesion.

Product Data & Ordering Information:

Material: 0.028" PVC (Polyvinyl Chloride)
 Dimensions: 1/2" & 5/8" depths

Product code	Board thickness	Flange	Length	Pcs./Ctn.
CT50-8	1/2"	1"	8'	50
CT50-10	1/2"	1"	10'	50
CT50-12	1/2"	1"	12'	50
CT58-8	5/8"	1"	8'	50
CT58-10	5/8"	1"	10'	50
CT58-12	5/8"	1"	12'	50

Note: Rip-Bead L-Bead Archway available for 1/2" and 5/8" board thickness in 10' lengths.


ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C841 (Interior Finishes)
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Support for Plaster & Gypsum Board)

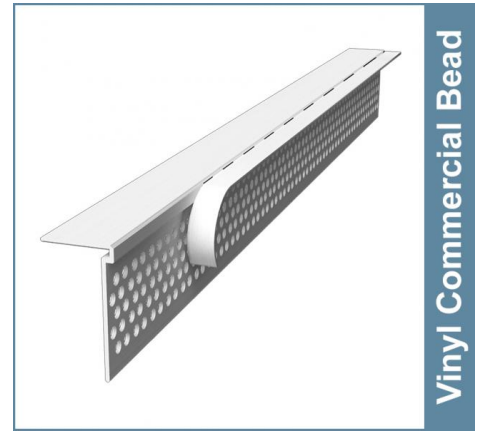

Vinyl Commercial Bead

- Rust proof and dent resistant
- Eliminates clean up and masking tape
- Produces finished edges at panel terminations
- Multiple perforations enhance joint compound adhesion



Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: