

Rip-Bead® L-Bead

Commercial Beads

Rip Bead® L-Bead produces an exceptional finish at intersection of gypsum panels to ceiling grid, window returns and dissimilar wall types. A tear-away strip on the Rip Bead L-Bead provides a protective edge and a guide for the drywall finishing knives. Once joint compound is applied, finished and painted, the tear-away strip is removed to form a crisp, clean edge. Multiple perforations along the nailing flange enhance strong compound adhesion.

Product Data & Ordering Information:

Material: 0.028" PVC (Polyvinyl Chloride)

Dimensions 1/2" & 5/8" depths

| Product code | Board thickness | Flange | Length | Pcs./Ctn. |
|--------------|-----------------|--------|--------|-----------|
| CT50-8 | 1/2" | 1" | 8' | 50 |
| CT50-10 | 1/2" | 1" | 10' | 50 |
| CT50-12 | 1/2" | 1" | 12' | 50 |
| CT58-8 | 5/8" | 1" | 8' | 50 |
| CT58-10 | 5/8" | 1" | 10' | 50 |
| CT58-12 | 5/8" | 1" | 12' | 50 |


Note: Rip-Bead L-Bead Archway available for 1/2" and 5/8" board thickness in 10' lengths.

Code Approvals & Performance Standards

- [ASTM C840](#) Standard Specification for Application and Finishing of Gypsum Board
- [ASTM C841](#) Standard Specification for Installation of Interior Lathing and Furring
- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [ASTM D3678](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Interior - Profile Extrusions
- [SDS Vinyl Corp](#) PVC Compounds

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

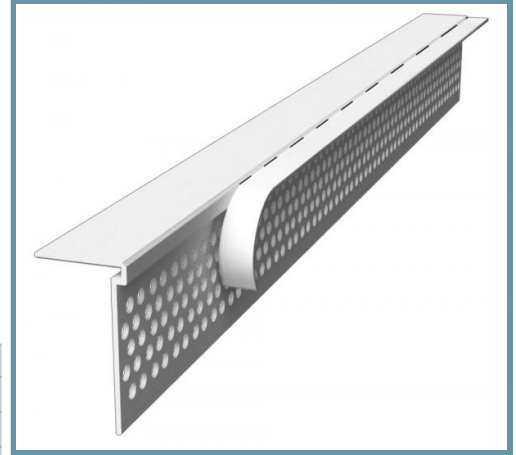

- Rustproof and dent-resistant
- Eliminates clean up and masking tape
- Produces finished edges at panel terminations
- Multiple perforations enhance joint compound adhesion

