



## Architectural Vented Channel Reveal - Surface Mount

### Create clear surface channels in exterior wall and ceiling systems

A variation on the vented channel reveal for when the design style calls for a different aesthetic. The slots function in the same way as the holes, allowing air to flow around the perimeter to assist with temperature control and moisture management. Always use a rigid backing or blocking material behind surface-mounted reveal. Has 3/4" elongated vent holes. Perforated flanges allow the base coat mixture to easily flow through and bond with the substrate. Vent clips are provided with vented channel reveals to connect reveal sections and assist in alignment. Caulk all intersections, butt joints, ends, and corners at the time of installation. Not to be used in lieu of control joints or expansion joints. Factory fabricated intersections are also available for all ClarkDietrich channel reveals.

### Product Data & Ordering Information:

Product Code	Finish Thickness	Min Board Thickness	Reveal Width	Perforated	PCS/Box
ADCV50-150SE	1/16" - 3/32"	1/2"	1-1/2"	1-1/8"	25
ADCV50-200SE	1/16" - 3/32"	1/2"	2"	1-1/8"	25
ADCV50-300SE	1/16" - 3/32"	1/2"	3"	1-1/8"	20
ADCV50-400SE	1/16" - 3/32"	1/2"	4"	1-1/8"	20
ADCV58-150SE	1/16" - 3/32"	5/8"	1-1/2"	1-1/8"	20
ADCV58-200SE	1/16" - 3/32"	5/8"	2"	1-1/8"	20
ADCV58-300SE	1/16" - 3/32"	5/8"	3"	1-1/8"	20
ADCV58-400SE	1/16" - 3/32"	5/8"	4"	1-1/8"	20

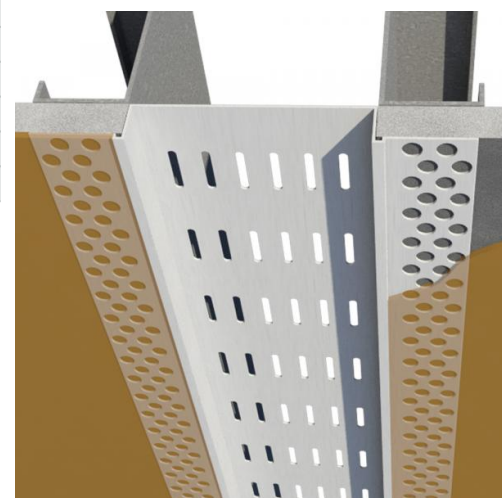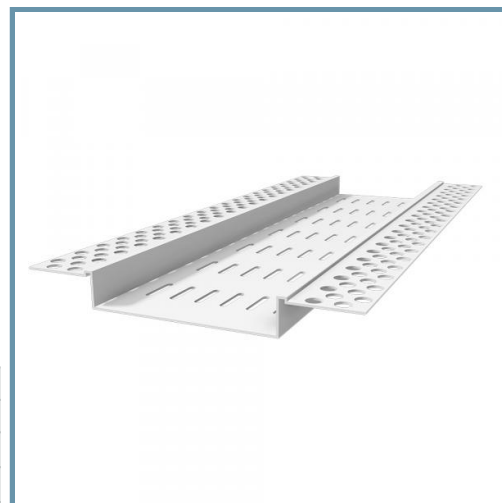

### Code Approvals & Performance Standards

- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [ASTM E2110](#) Standard Terminology for Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2273](#) Standard Test Method for Determining the Drainage Efficiency of Exterior Insulation and Finish Systems (EIFS) Clad Wall Assemblies
- [ASTM E2486](#) Standard Test Method for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2511](#) Standard Guide for Detailing of EIFS-Clad Barrier and Drainage Wall Assemblies
- [ASTM E2568](#) Standard Specification for PB Exterior Insulation and Finish Systems
- [SDS Vinyl Corp](#) PVC Compounds

### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.