

## Soffit Vent Control Joint Combination

### Continuous, one-piece, combination design like a control joint

Allows movement of the plaster with a vent area that has a perforated flange to assist with embedment.

### Product Data & Ordering Information:

| Product code | Ground | Reveal Width | Overall Width | Vent Area per LF | Pcs./Box |
|--------------|--------|--------------|---------------|------------------|----------|
| 1538R-400V   | 3/8"   | 4"           | 7"            | 16 sq. in.       | 12       |
| 1550R-400V   | 1/2"   | 4"           | 7"            | 16 sq. in.       | 12       |
| 1558R-400V   | 5/8"   | 4"           | 7"            | 16 sq. in.       | 10       |
| 1575R-400V   | 3/4"   | 4"           | 7"            | 16 sq. in.       | 8        |
| 1578R-400V   | 7/8"   | 4"           | 7"            | 16 sq. in.       | 8        |
| 15100R-400V  | 1"     | 4"           | 7"            | 16 sq. in.       | 8        |


Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing.

### Code Approvals & Performance Standards

- [ASTM C926](#) Standard Specification for Application of Portland Cement - Based Plaster
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [SDS Vinyl Corp](#) PVC Compounds

### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

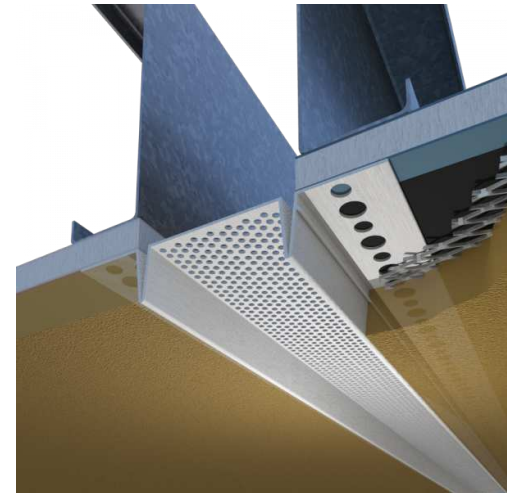

- Available in 2", 3" and 4" reveal widths