

07.24.00 (Exterior Insulation & Finish Systems)

Sloped Starter Strip with Drip

Heavy-duty, base support starter strips and perimeter casing bead with drip legs

Sloped design with weep holes in the front provides drainage away from the substrate. The drip legs move moisture away from openings and foundation walls. Perforated flanges allow the base coat mixture to easily flow through and bond to the substrate. Includes the ClarkDietrich Keylock™ Splice for connecting multiple sections and to assist in their alignment. Caulk all intersections, butt joints, ends, and corners at the time of installation.

Applications: EIFS

Product Data & Ordering Information:

Product Code	Finish Thickness	Insulation Thickness	Back Flange	Perforated Flange	PCS/Box
CBS250-332SDWF	3/32"	2-1/2"	2-1/4"	5/8"	15
CBS275-332SDWF	3/32"	2-3/4"	2-1/4"	5/8"	10
CBS300-332SDWF	3/32"	3"	2-1/4"	5/8"	10
CBS325-332SDWF	3/32"	3-1/4"	2-1/4"	5/8"	10
CBS350-332SDWF	3/32"	3-1/2"	2-1/4"	5/8"	10
CBS375-332SDWF	3/32"	3-3/4"	2-1/4"	5/8"	10
CBS400-332SDWF	3/32"	4"	2-1/4"	5/8"	10

U.S. Patent Number 5,970671 and 6,134,847

ASTM & Code Standards

Product Specifications


- ASTM E2568 - Standard Specification for PB Exterior Insulation and Finish Systems
- ASTM D1784 - Standard Specification for Rigid Poly Vinyl Chloride (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds
- ASTM D4216 (Cell class 13244C) - Standard Specification for Rigid Poly Vinyl Chloride (PVC) Compounds and Related PVC and Chlorinated Poly Vinyl Chloride (CPVC) Building Products Compounds
- ASTM D638 - Standard Test Methods for Tensile Properties of Plastics
- ASTM D790 - Standard Test Methods for Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials
- ASTM D256 - Standard Test Methods for Determining the Izod Pedulum Impact Resistance of Plastics
- ASTM D648 - Standard Test Methods for Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position
- ASTM D696 - Standard Test Methods for Coefficient of Linear Thermal Expansion of Plastics Between -30 Degrees Celsius and 30 Degrees Celsius Vitreous Silicia Dilatometer Installation Standards
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Installation Standards

- ASTM E2110 - Standard Terminology for Exterior Insulation & Finish Systems (EIFS)
- ASTM E2486 - Standard Test Methods for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS)
- ASTM E2511 - Standard Guide for Detailing of EIFS-Clad Barrier and Drainage Wall Assemblies
- ASTM E2273 - Standard Method for Determining the Drainage Efficiency of Exterior Insulation and Finish Systems (EIFS) Clad Wall Assemblies

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

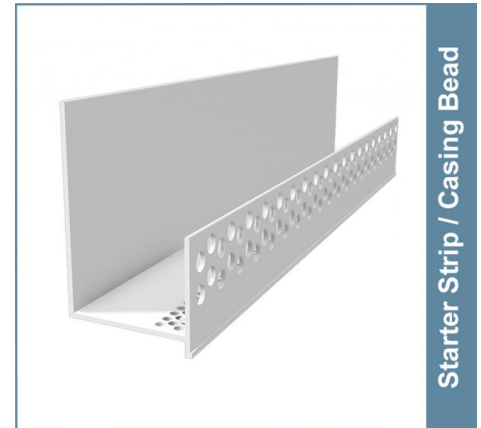

- Available for insulation boards of 3/4", 1" 1-1/4", 1-1/2", 1-3/4", 2" 2-1/4", 2-1/2", 2-3/4", 3", 3-1/4", 3-1/2", 3-3/4" or 4" thickness



Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: