

Soffit Vent with J-Flange

J-Bead flanges cover raw edges of soffit board

ClarkDietrich one-piece soffit vents provide an economical means for venting soffit areas. Vent clips are provided for proper connection and alignment of soffit vent. Caulk all intersections, butt joints, ends and corners at time of installation.

Product Data & Ordering Information:


Product Code	Vent	Board	Overall	Vent Area	PCS/Box
	Width	Thickness	Width	Per LF	
CSJ38-150V	1-1/2"	3/8"	3-1/2"	6 sq. in.	20
CSJ50-150V	1-1/2"	1/2"	3-1/2"	6 sq. in.	20
CSJ58-150V	1-1/2"	5/8"	3-1/2"	6 sq. in.	20

Code Approvals & Performance Standards

- [ASTM C926](#) Standard Specification for Application of Portland Cement - Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [ASTM E2110](#) Standard Terminology for Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2486](#) Standard Test Method for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2568](#) Standard Specification for PB Exterior Insulation and Finish Systems
- [SDS Vinyl Corp](#) PVC Compounds

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

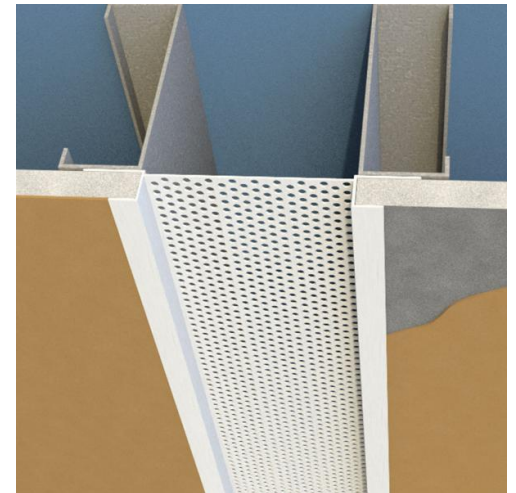

- Available 1", 1-1/2", 2", 3" & 4" vent widths