

## Soffit Vents (One-Piece)

**Continuous one-piece soffit vent with reinforcing rib to key into stucco with a perforated flange**

Vent clips are provided to connect soffit vent and to assist in alignment, with perforated flange.

### Product Data & Ordering Information:

| Product code | Ground | Vent Width | Overall width | Vent Area per LF | Pcs./Box |
|--------------|--------|------------|---------------|------------------|----------|
| CS50-200V    | 1/2"   | 2"         | 4"            | 8 sq. in.        | 20       |
| CS58-200V    | 5/8"   | 2"         | 4"            | 8 sq. in.        | 18       |
| CS75-200V    | 3/4"   | 2"         | 4"            | 8 sq. in.        | 15       |
| CS78-200V    | 7/8"   | 2"         | 4"            | 8 sq. in.        | 13       |
| CS100-200V   | 1"     | 2"         | 4"            | 8 sq. in.        | 12       |

Note: Items are made to order, lead time will apply. Contact ClarkDietrich customer service at 1-800-648-4695.



Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing.

### Code Approvals & Performance Standards

- [ASTM C926](#) Standard Specification for Application of Portland Cement - Based Plaster
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [SDS Vinyl Corp](#) PVC Compounds

### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

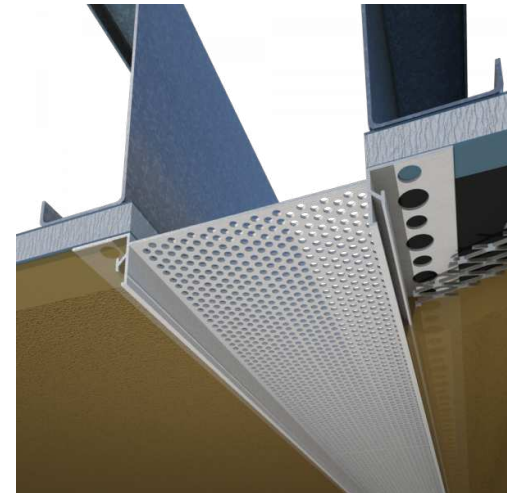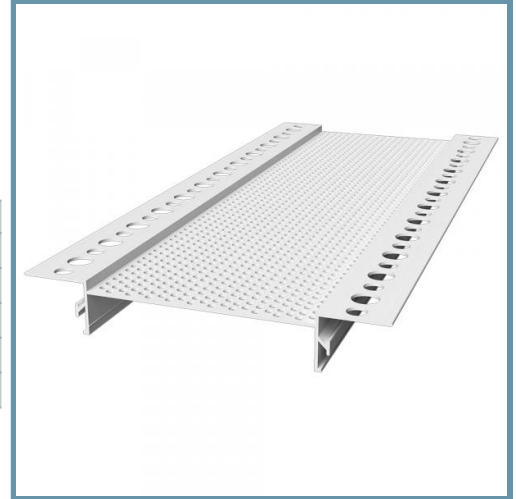

- Available in 2", 3" 4" and 6" vent widths