

## Soffit Vents (Two-Piece Narrow Overhang)

### Continuous two-piece soffit vent for stucco

Vertical edge clips are provided for special installations. Designed to work on narrow overhangs.

#### Product Data & Ordering Information:

Product code	Ground	Vent Width	Overall width	Vent Area per LF	Pcs./Box
CS50-400VZF	1/2"	4"	5-1/4"	16 sq. in.	15
CS58-400VZF	5/8"	4"	5-1/4"	16 sq. in.	15
CS75-400VZF	3/4"	4"	5-1/4"	16 sq. in.	14
CS78-400VZF	7/8"	4"	5-1/4"	16 sq. in.	12
CS100-400VZF	1"	4"	5-1/4"	16 sq. in.	12

Note: Items are made to order, lead time will apply. Contact ClarkDietrich customer service at 1-800-648-4695.



Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing.

#### Code Approvals & Performance Standards

- [ASTM C926](#) Standard Specification for Application of Portland Cement - Based Plaster
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [SDS Vinyl Corp](#) PVC Compounds

#### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

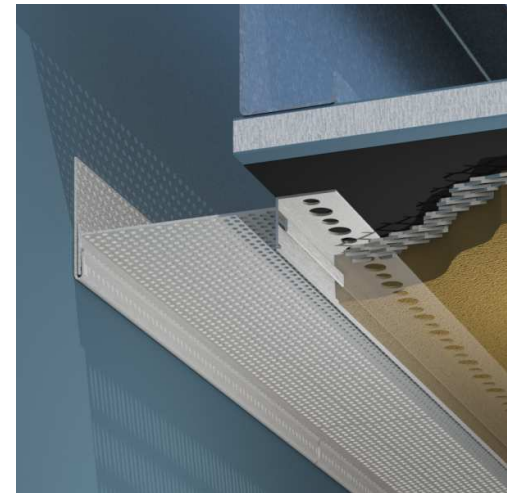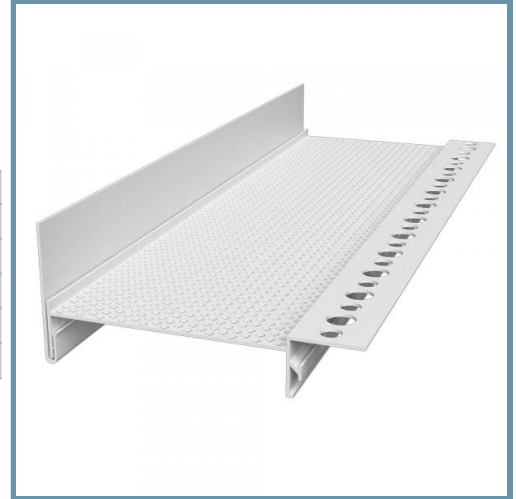

- Available in 2", 3" 4" and 6" vent widths