

## Corner Expansion Joint (Inside Corner)

For conditions where the project requires expansion joint movement on inside corners


These parts come preassembled, and may require field alignment.

### Product Data & Ordering Information:

Product code	Ground	Overall width	Length	Pcs./Box
CXJ-38	3/8"	2-3/4" x 2-3/4"	10'	15
CXJ-50	1/2"	2-3/4" x 2-3/4"	10'	15
CXJ-58	5/8"	2-3/4" x 2-3/4"	10'	15
CXJ-75	3/4"	2-3/4" x 2-3/4"	10'	15
CXJ-78	7/8"	2-3/4" x 2-3/4"	10'	12
CXJ-100	1"	2-3/4" x 2-3/4"	10'	12

Note: Also available in 135° angle. Reveal available in 1" and 1-1/2" widths.

Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing.

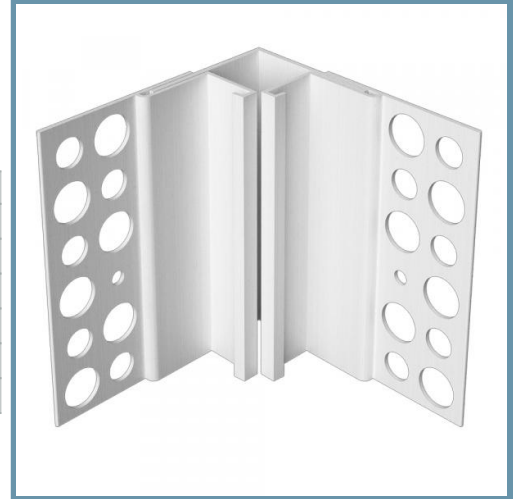

### Code Approvals & Performance Standards

- [ASTM C841](#) Standard Specification for Installation of Interior Lathing and Furring
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1780](#) Standard Practice for Installation Methods for Cement-based Adhered Masonry Veneer
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [SDS Vinyl Corp](#) PVC Compounds

### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

