

DEFS Control Joint with Removable Tape

Designed to relieve stress caused by expansion and contraction

Control joint used for DEFS applications to relieve stress caused by expansion and contraction and control cracking in large areas of walls and ceilings. The removable tape creates a mask over the expansion slot during installation for a clean finish. Large perforations allow the base coat mixture to easily flow through and bond to the substrate. Recommended usage is for every 130-140 sq. ft. with no one side being longer than 15ft. Caulk all intersections, butt joints, ends, and corners at the time of installation.

Product Data & Ordering Information:


Product Code	Finish	Board	Perforated	V Reveal (C)	PCS/Box
	Thickness	Thickness (A)	Flanges (B)		
DCJ-50V	1/16"	1/2"	5/8"	3/16"	30
DCJ-58V	1/16"	5/8"	5/8"	3/16"	30

Code Approvals & Performance Standards

- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [ASTM E2110](#) Standard Terminology for Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2486](#) Standard Test Method for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2511](#) Standard Guide for Detailing of EIFS-Clad Barrier and Drainage Wall Assemblies
- [SDS Vinyl Corp](#) PVC Compounds

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

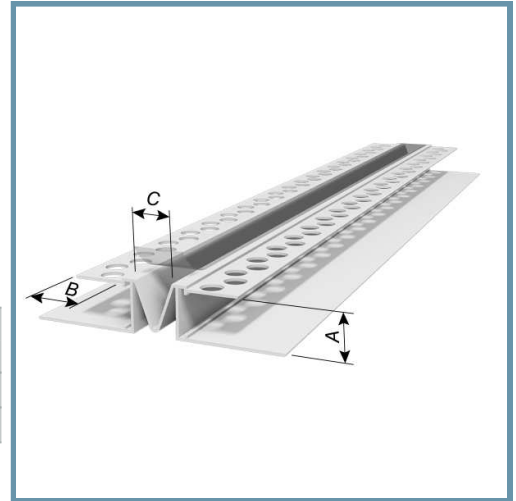

Made in white or these standard thru-body colors:



Contact ClarkDietrich for pricing and availability

