

Drip Screed Reveal

Designed for stucco or plaster soffits

Used when a drip and reveal need to be combined.

Product Data & Ordering Information:

Product code	Ground (A)	Flange (B)	Reveal (C)	Pcs./Box
DCS50-50	1/2"	1-3/4"	1/2"	10
DCS58-50	5/8"	1-3/4"	1/2"	10
DCS75-50	3/4"	1-3/4"	1/2"	9
DCS78-50	7/8"	1-3/4"	1/2"	9
DCS100-50	1"	1-3/4"	1/2"	9
DCS50-75	1/2"	1-3/4"	3/4"	10
DCS58-75	5/8"	1-3/4"	3/4"	10
DCS75-75	3/4"	1-3/4"	3/4"	9
DCS78-75	7/8"	1-3/4"	3/4"	9
DCS100-75	1"	1-3/4"	3/4"	9
DCS50-100	1/2"	1-3/4"	1"	10
DCS58-100	5/8"	1-3/4"	1"	10
DCS75-100	3/4"	1-3/4"	1"	9
DCS78-100	7/8"	1-3/4"	1"	9
DCS100-100	1"	1-3/4"	1"	9


Dissimilar grounds may be specified. Contact ClarkDietrich for more information.

Code Approvals & Performance Standards

- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [SDS Vinyl Corp](#) PVC Compounds

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

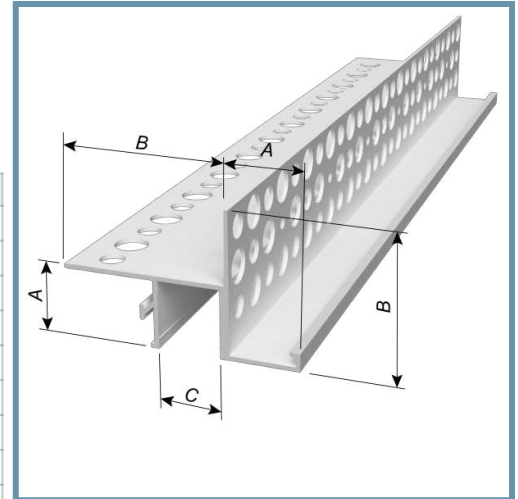

Made in white or these standard thru-body colors:

Tan Brown Gray Black

Contact ClarkDietrich for pricing and availability

