

Drip Flashing for Rainscreen (DFL78-RS10)

Designed to be used at the bottom of entangled mesh rainscreens.

The Drip Flange for Rainscreen provides venting and draining for the 10mm entangled mesh rainscreen or other medium as defined by IBC & IRC codes on plywood and OSB sheathing for exterior. This component serves as the Foundation Weep Screed because of its 3.5" attachment flange and has drainable holes in the bottom ground to manage moisture out and allow air flow into the air space behind the cladding.


Product Data & Ordering Information:

Product code	Rainscreen Thickness	Overall Ground (A)	Flange (B)	Drip (C)	Air Channel (D)	Length	Packaging
DFL78-RS10	10mm	1-1/4"	3-1/2"	1/4"	1/4" (Sloped)	10'	20 per box

Code Approvals & Performance Standards


- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1780](#) Standard Practice for Installation Methods for Cement-based Adhered Masonry Veneer
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D256](#) Standard Test Methods for Determining the Izod Pendulum Impact Resistance of Plastics
- [ASTM D638](#) Standard Test Method for Tensile Properties of Plastics
- [ASTM D648](#) Standard Test Method for Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [ASTM E2925](#) Standard Specification for Manufactured Polymeric Drainage and Ventilation Materials Used to Provide a Rainscreen Function
- [SDS Vinyl Corp](#) PVC Compounds

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

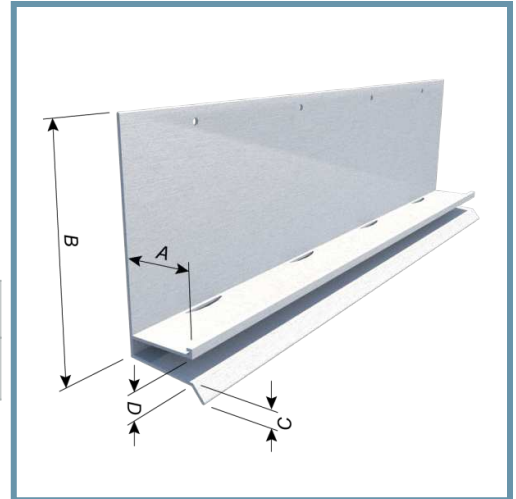

- Patent Pending

Made in white or these standard thru-body colors:



Contact ClarkDietrich for pricing and availability

