

## "F" Series Control Joint and Vent

### Designed to work on narrow overhangs

Used where vents are needed to go against fascia or walls. Vent clips are provided to connect soffit vents and a perforated flange aids in embedment.

**Applications: Stucco**

#### Product Data & Ordering Information:

Product code	Ground	Reveal Width	Overall Width	Vent Area per LF	Pcs./Box
F1538R-300V	3/8"	3"	5"	15 sq. in.	15
F1550R-300V	1/2"	3"	5"	15 sq. in.	15
F1558R-300V	5/8"	3"	5"	15 sq. in.	12
F1575R-300V	3/4"	3"	5"	15 sq. in.	12
F1578R-300V	7/8"	3"	5"	15 sq. in.	10
F15100R-300V	1"	3"	5"	15 sq. in.	10

Note: F15 Series can be ordered with the 300VFZ clip for installation.  
 Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing.

#### ASTM & Code Standards

##### Product Specifications

- ASTM D638 - Standard Test Method for Tensile Properties of Plastics
- ASTM D790 - Standard Test Methods for Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials
- ASTM D256 - Standard test Methods for Determining the Izod Pendulum Impact Resistance of Plastics
- ASTM D648 - Standard Test Method for Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position
- ASTM D696 - Standard Test Method for Coefficient of Linear Thermal Expansion of Plastics Between Negative 30 Degress Celsius and 30 Degrees Celsius with a Vitreous Silica Dilatometer
- ASTM D1784 - Standard Classification System and Basis for Specification for Rigid Poly Vinyl Chloride (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds
- ASTM D4216 Cell Class 13244C - Standard Specification for Rigid Poly Vinyl Chloride (PVC) and Related PVC and Chlorinated Poly Vinyl Chloride (CPVC) Building Products Compounds


##### Installation Standards

- ASTM C1861 - Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- ASTM C1063 - Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster. Table, 1, PVC for Exterior.
- ASTM C1780 - Standard Practice for Installation Methods for Cement-Based Adhered Masonry Veneer
- ASTM C841 - Standard Specification for Installation of Interior Lathing and Furring
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)


#### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

#### 09.22.00 (Supports for Plaster)

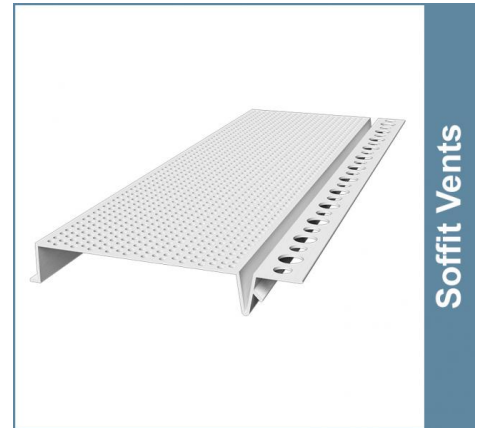

Available in 2", 3" and 4" reveal widths

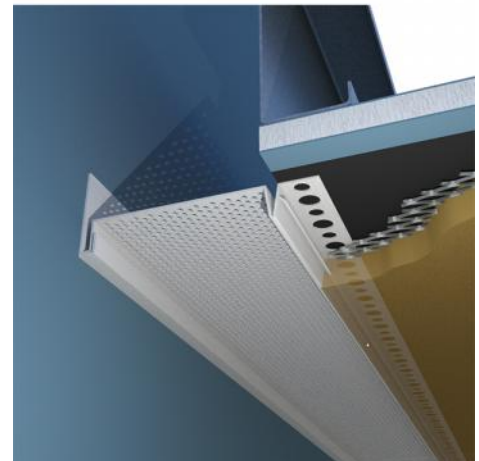

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: