

## DEFS Muddable J-Bead

**Designed to cover raw edges of board in Direct-Applied Exterior Finish Systems**

Large perforations allow the base coat to easily flow through and bond to the substrate. Caulk all intersections, butt joints, ends and corners at the time of installation.

### Product Data & Ordering Information:


| Product Code | Finish Thickness | Board Thickness (A) | Perforated Flange (B) | Return Flange (C) | PCS/Box |
|--------------|------------------|---------------------|-----------------------|-------------------|---------|
| MJB50E       | 1/16"            | 1/2"                | 1-1/8"                | 1/4"              | 50      |
| MJB58E       | 1/16"            | 5/8"                | 1-1/8"                | 1/4"              | 50      |

### Code Approvals & Performance Standards

- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [ASTM E2110](#) Standard Terminology for Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2273](#) Standard Test Method for Determining the Drainage Efficiency of Exterior Insulation and Finish Systems (EIFS) Clad Wall Assemblies
- [ASTM E2486](#) Standard Test Method for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2511](#) Standard Guide for Detailing of EIFS-Clad Barrier and Drainage Wall Assemblies
- [SDS Vinyl Corp](#) PVC Compounds

### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

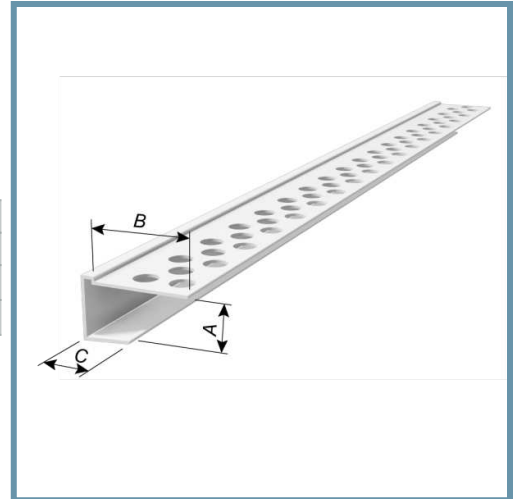

Made in white or these standard thru-body colors:



Contact ClarkDietrich for pricing and availability

