

## Casing Bead with Reveal


**Designed to terminate stucco and plaster**

Designed to terminate stucco and plaster at window or door openings to create a reveal.

### Product Data & Ordering Information:

Product code	Ground (A)	Flange (B)	Board (C)	Pcs./Box
RS6650-50	1/2"	1-3/4"	1/2"	20
RS6658-50	1/2"	1-3/4"	1/2"	20
RS6658-75	3/4"	1-3/4"	3/4"	20
RS6658-100	1"	1-3/4"	1"	20
RS6658-125	1-1/4"	1-3/4"	1-1/4"	20
RS6678-58	7/8"	1-3/4"	5/8"	20

Note: If weep holes are required, add W to the product code, example: RS6650-50W.  
 Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing.

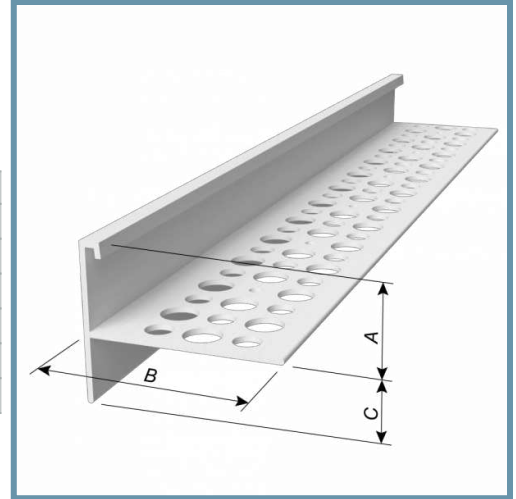

### Code Approvals & Performance Standards

- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1780](#) Standard Practice for Installation Methods for Cement-based Adhered Masonry Veneer
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [SDS Vinyl Corp](#) PVC Compounds

### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

