

## Fence Brackets


### CDFB24G

Provides a secure fit for the connection of 2 x 4 fence boards to post. Easier to plan and build, holes are sized to #6 wood screws or 8d nails.

#### Product Data & Ordering Information:

<b>Material</b>	Structural Grade 50 Type H (ST50H), 50ksi (340 MPa)
<b>Coating</b>	G185 (Z550) hot-dipped Galvanized coating
<b>Thickness</b>	20ga (33mil), 0.0346" Design thickness, 0.0329" Minimum thickness
<b>Dimensions</b>	3/4" x 1-5/8" x 3-3/8"
<b>Packaging</b>	100 pcs/ctn
<b>Product weight</b>	0.11 lbs/ea

Product code	Material	D	W	H
CDFB24G	20ga	3/4"	1-5/8"	3-3/8"

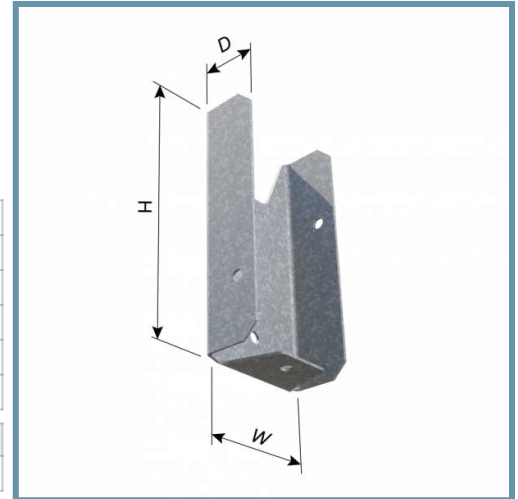

#### Code Approvals & Performance Standards

- [ASTM A653](#) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- [ASTM A1003](#) Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members
- [SDS For ASTM A1003 Steel Framing Products](#) For Interior Framing, Exterior Framing and Clips/Accessories

**Sustainability Credits** For more details and LEED letters contact Technical Services at 888-437-3244 or visit [clarkdietrich.com/LEED](http://clarkdietrich.com/LEED).

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

