


## FAS-093X Fire Rated Control Joint

Drywall or veneer plaster fire rated control joint

A composite control joint with intumescent tape factory applied to the back side of the control joint. The FAS-093X has been tested according to UL-2079 "Test For Fire Resistance of Building Joint Systems" and is used to relieve stresses of expansion and contraction of drywall interior partitions or ceilings running in a horizontal or vertical direction. The opening is protected by an orange plastic tape to indicate the fire rating this tape is removed after joint compound has been applied and the finish is completed. The section is fabricated from hot-dipped galvanized steel complying with ASTM A653, and ASTM A1003.

09.22.16 (Non-Structural Metal Framing)

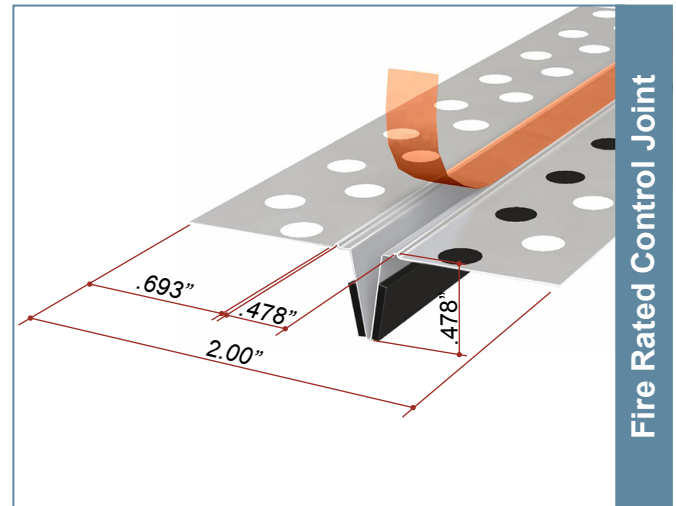

### Product Data & Ordering Information:

Material: Grade 33 Type H (33ksi)  
Coating: G40  
Thickness: 0.015"  
Grounds: 3/32" (2.4mm)  
Length: 10'-0" long  
Packaging: (20) pieces per carton – (25) cartons per pallet


- No Drywall Rips Required
- No Sealant Required
- No Mineral Wool Required
- UL Listed Joint System
- US Patent 8,671,632

### ASTM & Code Standards:

- ASTM A1003, C653
- UL WW-D-0172 1 & 2 Hour Ratings
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs).



**1 Hour Fire Rating**  
(1) 5/8" Type "X" Drywall on each side

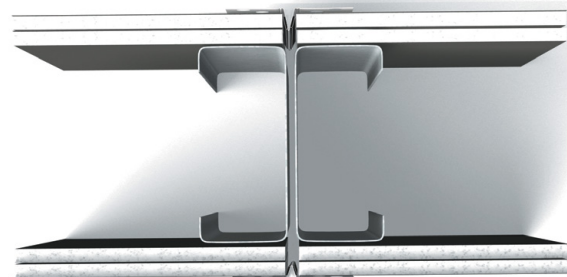

**2 Hour Fire Rating**  
(2) 5/8" Type "X" Drywall on each side

### Project Information

Name:  
Address:

### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax: