

#15 Double-V Control Joint (VVCJ)

Expanded flange control joint

#15 Expanded Flange Control Joint (Double-V) is used to relieve stresses in large plastered areas of walls, ceilings, and stucco areas. The Double-V Control Joint counteracts the inherent shrinkage during stucco curing and general thermal changes.

This nearly inconspicuous, expanded wing control joint minimizes cracking and assures proper plaster and stucco thickness.

Ground heights include 3/8" for thin coat plaster and 1/2", 3/4" and 7/8" for conventional plaster applications. Follow use provisions outlined in ASTM C1063.

The #15 Double-V Control Joint is also available in zinc alloy for increased corrosion resistance.

Product Data & Ordering Information:

Material: 26 Gauge, G-60 Hot-Dipped Galvanized Steel
 Also available in 99.97% pure Zinc, compliant with ASTM B-69
 Grounds: 3/8", 1/2", 5/8", 3/4" and 7/8" Grounds, 10' lengths

Ground	Length	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn.	Ctn./Skid
3/8"	10'	24	240	47 lbs.	36
1/2"	10'	24	240	54 lbs.	27
5/8"	10'	24	240	54 lbs.	27
3/4"	10'	24	240	69 lbs.	30
7/8"	10'	24	240	76 lbs.	30

ASTM & Code Standards:

- ASTM C841 (interior), C1063 (exterior), CE 240.01, ASTM C926, ML/SFA-920, the International Code Council IBC and IRC.
- All Expanded Metal Lath Accessories are fabricated from prime galvanized steel G60 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69 as required in ASTM C1063 and C847.
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- For installation and placement instructions refer to ASTM C1063, C841 and C926.

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution and high humidity.


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).


LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.36 (Metal Lath)

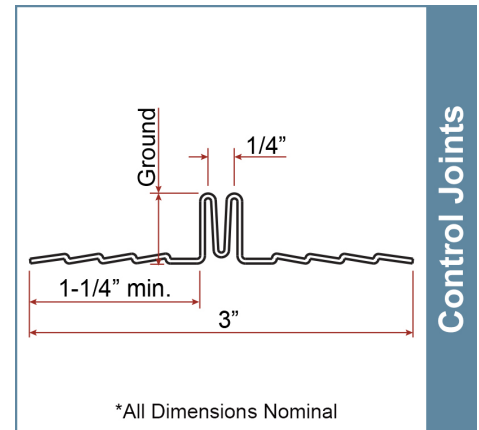

Control Joints

*All Dimensions Nominal

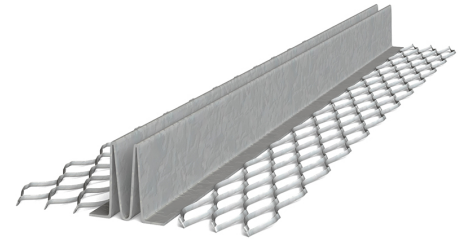

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: