

Paper-Backed (APB) Diamond Mesh Lath

A galvanized expanded steel plaster/stucco base

A superior mesh multi-purpose expanded steel base with an approved Grade-D weather resistant barrier attached. Application of asphalt paper-backed (APB) metal lath is used behind stone, traditional stucco and tile installations as a code compliant weather resistant barrier. It provides protection against wet areas during stucco curing. The asphalt paper-backed weather resistant barrier meets Federal Specification UUB790A: Type 1, Grade-D, Style 2 and is printed on the face of the paper for easy identification. Optional 60 minute Grade-D paper available for higher weather resistance and durability.

Product Data & Ordering Information:

Material: G-60 Galvanized Steel
Type 1, Grade-D, Style 2 Paper
Packaged: 25 bundles or 250 pieces per pallet

Product Code	Wt. per Sq. Yd.	Sheet Size	Pcs./Bdl.	Yds./Bdl.	Yds./Pallet
LAM(O)	2.5 lbs.	27" x 97"	10	20	500
LAM(O)	3.4 lbs.	27" x 97"	10	20	500

ASTM & Code Standards:

- Material: ASTM C847
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A-653/A-653M.
- Intertek CCRR-0204 - Metal Lath - Code Compliance Research Report
- Asphalt paper-backed breather sheet meets Federal Specification UUB790A: Type 1, Grade-D, Style 2, ASTM D226 #15 Style
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- Installation: C1063 (exterior), ASTM C841 (interior), ASTM C-1780 (thin veneer stone)

Storage:

All stored materials shall be kept dry and out of the weather. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination per ASTM C847 & C1063. Paper-backed lath should not be stored outside where ran water can become trapped between sheets, thereby oxidizing the metal.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.

Related Products

- APB is available with Diamond Mesh, Self-Furring Dimple and Self-Furring V-Groove Lath



Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.36 (Metal Lath)

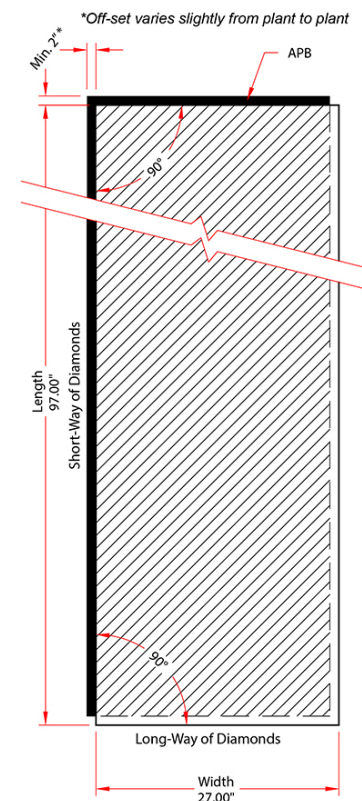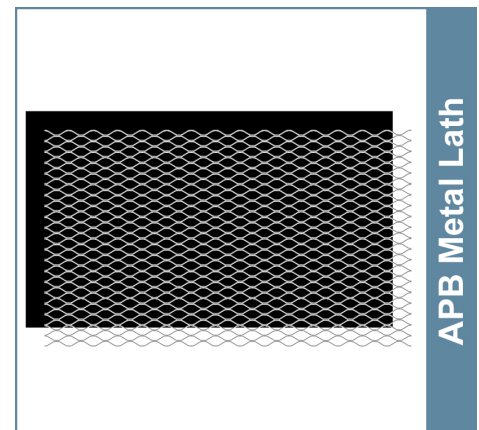

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: