

## Self-Furring Dimple Lath

### 1/4" Self-furring, dimpled, expanded steel plaster and stucco base

A self-furring expanded dimpled metal lath ideal for interior and exterior use over sheathing, masonry, and other solid surfaces as required per ASTM C847, ASTM C1780, ASTM C1063. The 1/4" dimpled furring allows for more thorough plaster or stucco embedment into and behind the lath for superior mechanical bonding.

The dimple-patterned, self-furring plaster base is manufactured with evenly spaced indentations that hold the metal lath 1/4" away from the surface to be plastered. This results in an even and thorough embedment of the plaster.

The dimples are spaced every 4"-6" over the rectangular sheet. This lath is ideal for manufactured stone installations per ASTM C1780 or typical plaster applications per ASTM C1063.

2.5# and 3.4# self-furring dimple lath is available with G90 coating with a special order and lead time. Self-furring dimple lath is also available with a 60-Minute Grade-D asphalt paper-backing (APB) weather resistant barrier.

#### Product Data & Ordering Information:

Material: G60 Galvanized Steel  
 Packaged: 25 bundles or 250 pieces per pallet

| Product Code | Wt. per Sq. Yd. | Sheet Size | Pcs./Bdl. | Yds./Bdl. | Yds./Pallet |
|--------------|-----------------|------------|-----------|-----------|-------------|
| LAD          | 2.5 lbs.        | 27" x 97"  | 10        | 20        | 500         |
| LAD          | 3.4 lbs.        | 27" x 97"  | 10        | 20        | 500         |

#### ASTM & Code Standards:

- Material: ASTM C847
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A653/A653M.
- Intertek CCRR-0204 - Metal Lath - Code Compliance Research Report
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)
- Installation: ASTM C1063 (exterior), ASTM C841 (interior), ASTM C1780 (thin veneer stone).

#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination per ASTM C847 & C1063.

#### Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.



#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

### 09.22.36 (Metal Lath)

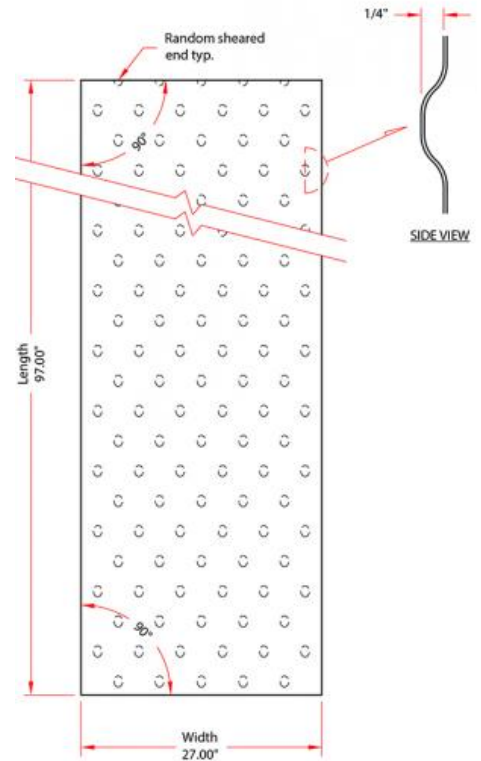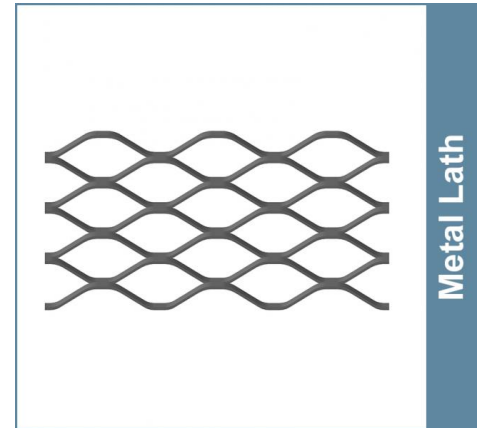

#### Project Information

Name:  
 Address:

#### Contractor Information

Name:  
 Contact:  
 Phone:  
 Fax:

#### Architect Information

Name:  
 Contact:  
 Phone:  
 Fax: