

Self-Furring V-Groove Lath

1/4" Self-Furring V-Groove expanded steel plaster or stucco base

Self-Furring V-Groove Metal Lath is manufactured with five, approximately 1/4" deep, embossed "V" ribs, spaced 6" on center along the length of the sheet. The V's allow thorough embedment into and behind the lath for superior mechanical bonding. A self-furring expanded V-Grooved metal lath, ideal for interior and exterior use over masonry, sheathing, and other solid surfaces as required per ASTM C847, ASTM C1780, ASTM C1063.

The V-grooved self-furring plaster base is manufactured with evenly spaced indentations, 6" apart which run the length of the lath sheet holding the metal lath a consistent 1/4" away from the surface to be plastered.

The V-groove provides an ideal point of attachment of the fastener to achieve ASTM C1063 compliance. V-grooved metal lath is available with or without a Grade-D asphalt paper-backing, weather resistant barrier.

Product Data & Ordering Information:

Material: G60 Galvanized Steel
 Packaged: 25 bundles or 250 pieces per pallet

Product Code	Wt. per Sq. Yd.	Sheet Size	Pcs./Bdl.	Yds./Bdl.	Yds./Pallet
LAV	2.5 lbs.	27" x 97"	10	20	500
LAV	3.4 lbs.	27" x 97"	10	20	500

ASTM & Code Standards:

- Material: ASTM C847
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A653/A653M.
- Intertek CCRR-0204 - Metal Lath - Code Compliance Research Report
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- Installation: ASTM C1063 (exterior), ASTM C841 (interior), ASTM C1780 (thin veneer stone).

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination per ASTM C847 & C1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.



Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.36 (Metal Lath)

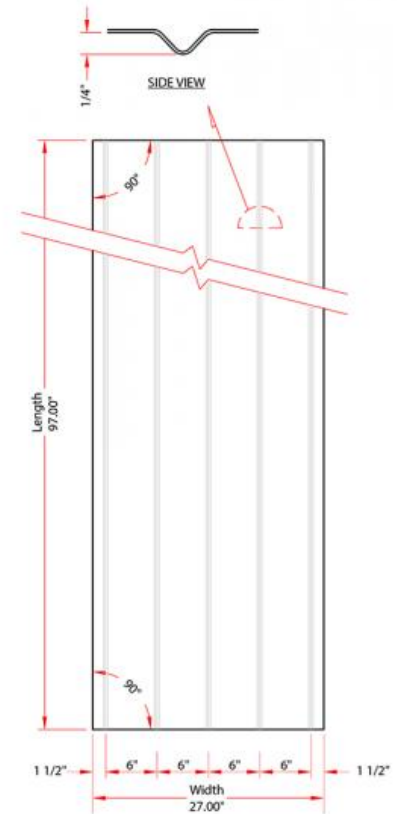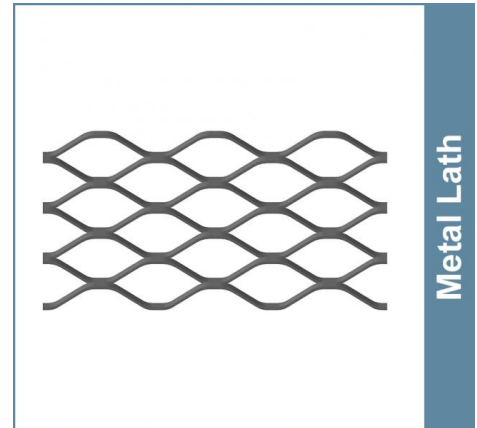

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: