

## Paper-Backed (APB) V-Groove SF Lath

### A galvanized expanded steel plaster/stucco base

A self-furring expanded V-grooved metal lath with a Grade-D Breather sheet spot attached. The V-groove self-furring plaster base is manufactured with evenly spaced indentations, 6" apart which run the length of the lath sheet holding 50% of the metal lath 1/4" away from the solid surface. Application of asphalt paper-backed (APB) metal lath is used behind traditional stucco, stone and tile installations. Also provides protection against wet areas during stucco curing. The asphalt paper-backed breather sheet meets Federal Specification UUB790A; Type 1, Grade D, Style 2 and is printed on the face of the paper for easy identification.

#### Product Data & Ordering Information:

Material: G-60 Galvanized Steel  
Type 1, Grade D, Style 2 Paper  
Packaged: 25 bundles or 250 pieces per pallet

Product Code	Wt. per Sq. Yd.	Sheet Size	Pcs./Bdl.	Yds./Bdl.	Yds./Pallet
LAV(O)	2.5 lbs.	27" x 97"	10	20	500
LAV(O)	3.4 lbs.	27" x 97"	10	20	500

#### ASTM & Code Standards:

- Material: ASTM C847
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A-653/A-653M.
- Asphalt paper-backed breather sheet meets Federal Specification UUB790A; Type 1, Grade D, Style 2, ASTM D226 #15 Style.
- Intertek CCRR-0204 - Metal Lath - Code Compliance Research Report
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)
- Installation: ASTM C1063 (exterior), ASTM C841 (interior), ASTM C1780 (thin veneer stone).

#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination, per ASTM C847 and C1063. Paper-backed lath should not be stored outside where rain water can become trapped between sheets, thereby oxidizing the metal.

#### Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.

#### Related Products

- APB is available with Diamond Mesh, Self-Furring Dimple and Self-Furring V-Groove Lath


#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)


**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

#### 09.22.36 (Metal Lath)

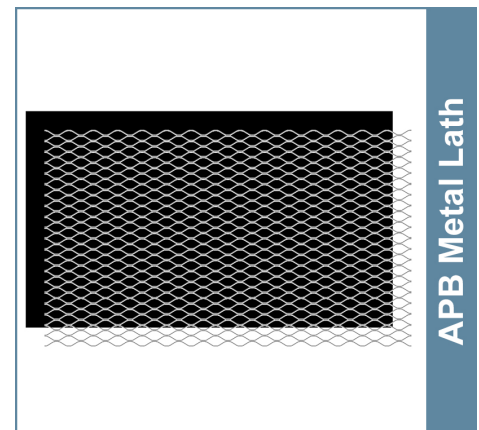

- Assist in complete embedment of scratch coat
- No need to use furring nails
- Spacing ideal for fasteners

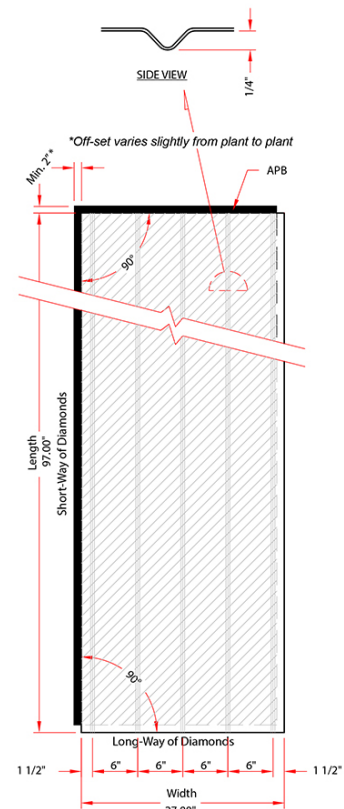

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: