

Paper-Backed (APB) V-Groove Self-Furring Lath

Galvanized expanded steel plaster/stucco base

A superior mesh multi-purpose expanded steel base with an approved Grade-D weather resistant barrier attached. Application of asphalt paper-backed (APB) metal lath is used behind stone, traditional stucco, and tile installations as a code compliant weather resistant barrier. It provides protection against wet areas during stucco curing. Paper-Backed Lath comes in flat and self-furring configurations to accommodate your installation needs.

APB is available with Diamond Metal Lath, Self-Furring Dimple Lath and Self-Furring V-Groove Lath.

Optional 60-minute Grade-D paper available for higher weather resistance and durability.

The asphalt paper-backed weather resistant barrier meets Federal Specification UUB790A: Type 1, Grade-D, Style 2 and is printed on the face of the paper for easy identification.

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.

Product Data & Ordering Information:

Material: G60 Galvanized Steel
 Type 1, Grade D, Style 2 Paper
 Packaged: 25 bundles or 250 pieces per pallet

Product Code	Wt. per Sq. Yd.	Sheet Size	Sheets/Bundle	Bundle/Pallet
LAV(O)	2.5 lbs.	27" x 97"	10	25
LAV(O)	3.4 lbs.	27" x 97"	10	25

ASTM & Code Standards:

- Material: ASTM C847
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A653/A653M.
- Asphalt paper-backed breather sheet meets Federal Specification UUB790A; Type 1, Grade D, Style 2, ASTM D226 #15 Style.
- Intertek CCRR-0204 - Metal Lath - Code Compliance Research Report
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- Installation: ASTM C1063 (exterior), ASTM C841 (interior), ASTM C1780 (thin veneer stone).

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination, per ASTM C847 and C1063. Paper-backed lath should not be stored outside where ran water can become trapped between sheets, thereby oxidizing the metal.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED


LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.36 (Metal Lath)

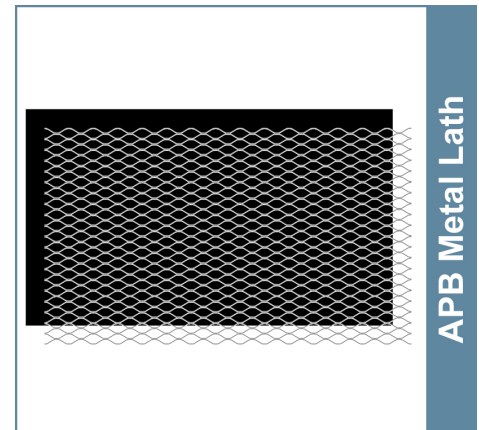

APB Metal Lath

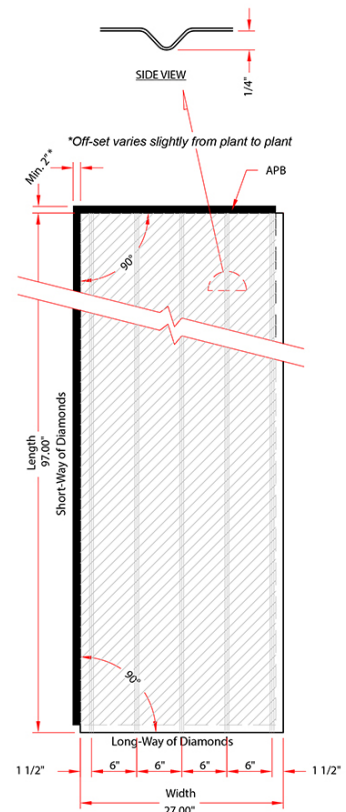

Project Information

Name:
 Address:

Contractor Information

Name:
 Contact:
 Phone:
 Fax:

Architect Information

Name:
 Contact:
 Phone:
 Fax: