

Stainless Steel Lath

Self-Furring V-Groove Metal Lath for Plaster/Stucco/Drainage/Base

A self-furring expanded V-grooved stainless steel metal lath, ideal for interior and exterior use over sheathing, masonry and other solid surfaces as required per ASTM C1063. The V-grooved self-furring plaster base is manufactured with evenly spaced indentations, 6" apart which run the length of the lath sheet holding the metal lath a consistent 1/4" away from the surface to be plastered. The V-groove provides an ideal point of attachment of the fastener to achieve ASTM C1063 compliance.

Product Data & Ordering Information

Material: Stainless Alloy 304 Grade
Packaged: Individual Sheets

Product code	Wt. per Sq. Yd.	Sheet Size
SS-VG-205	2.5 lbs.	27" x 97"
SS-VG-304	3.4 lbs.	27" x 97"

ASTM & Code Standards:

- ASTM A240 Standard Specification for Chromium & Chromium Nickel Stainless Steel Plate, Sheet, and for Pressure Vessels and General Applications.
- ASTM C847, for physical properties (LxWxH and weight) in Stainless 304 Alloy.
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

ALL FASTENERS OR ATTACHMENTS TO MATCH SAME STAINLESS ALLOY, OR ISOLATE THE GALVANIZED FASTENERS VIA NEOPRENE WASHER TO AVOID DISSIMILAR METAL CONTACT.


Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination per ASTM C1063, making sure edges are protected.


Limitations:

Stainless steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives. All fasteners or attachments to match same stainless alloy.

09.22.36 (Metal Lath)

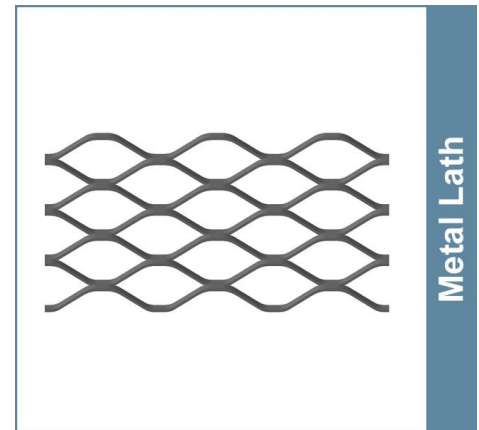

- Strength of Stainless Steel Alloy
- Multiple Application Uses
- Proven Historical Success

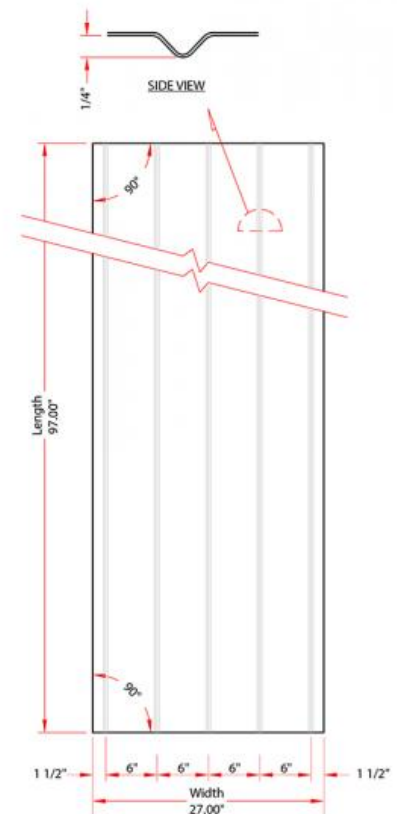

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: