

## Paper-Faced Corner Bead

### Paper-Faced Beads & Trims

Paper-faced tape-on beads combine galvanized metal corner and edge protection with high-grade paper tape to provide cost-effective, problem-free outside drywall corner finishing. Paper-faced beads are available in a number of different widths to suit most wallboard applications. Wider flange beads are used to cover imperfect corners, while shorter flanges are used to achieve maximum efficiency.

Paper-faced beads virtually eliminate corner cracks, edge chips and nail pops. These beads are applied using joint compound that embeds the paper bead to the wallboard paper. No mechanical fasteners like nails, screws, staples or crimps are used. Although paper-faced beads do cost more compared to traditional metal and vinyl, they provide reduced labor and materials by reducing the amount of joint compound needed and also eliminate one pass of finishing.

#### Product Data & Ordering Information

Material: 0.0125" min. thickness, galvanized coating  
 Dimensions: See table below - 50 pieces/carton

| Product Code    | Style            | A      | B      | C    | D    | Wt./Ctn. |
|-----------------|------------------|--------|--------|------|------|----------|
| CD1-WU or P1W   | Standard Leg     | 1/2"   | 3/4"   | 5/8" | 5/8" | 40 lbs   |
| CD1-WE or P1U   | Equal Leg        | 3/4"   | 3/4"   | 3/4" | 3/4" | 46 lbs   |
| CD1-XWU or P1XW | Extra Wide       | 7/8"   | 5/8"   | 5/8" | 3/4" | 46 lbs   |
| CD1-XWE or P1XU | Extra Wide Equal | 7/8"   | 7/8"   | 5/8" | 5/8" | 53 lbs   |
| CD1-SWE or P1SU | Super Wide Equal | 1-1/8" | 1-1/8" | 5/8" | 5/8" | 66 lbs   |


#### ASTM & Code Standards

- ASTM C1047
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)



#### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

### 09.22.00 (Support for Plaster & Gypsum Board)

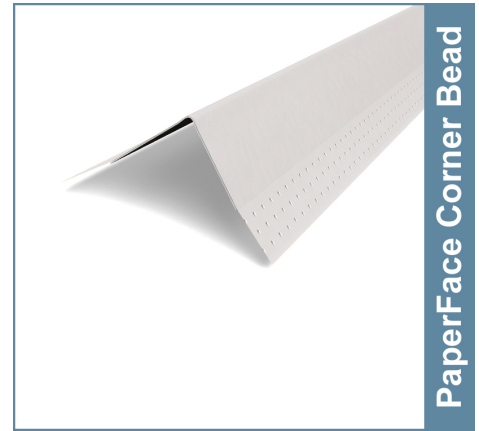

- Substantially reduces joint compound consumption and eliminates one finish coat
- Does not require mechanical fastening (no nails, staples, screws or crimps)
- Superior adhesion, bonding and paintability
- U.S. Patent Nos. 5,613,335 and 5,836,122



#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: